

LISTA MODELI 2023



CONTENTS

4 TECHNOLOGIES

13 PELLET STOVES_Air/Comfort Air Maestro

61 PELLET STOVES_Air/Comfort Air Easy

75 PELLET STOVES_Hydro Maestro

91 PELLET STOVES_Hydro Easy

97 PELLET_Fireplaces and inserts

109 WOOD_Fireplaces and inserts

125 PELLET_Accessories

133 WOOD_Accessories

TECHNOLOGIES



EXCLUDABLE VENTILATION

The No air function in ventilated stoves allows you to totally exclude or limit to a minimum the forced ventilation of the stove thus ensuring maximum silence and all the pleasure of heat diffused in the room by natural convection.



IGNITION IN 3 MINUTES

Product equipped with ceramic spark plug ensuring ignition times reduced by 40%.



WEEKLY ASH EMPTYING

The high capacity of the ash drawer allows the stove to be used for a week without emptying (average power consumption, 8 hours/day operation).



STRUCTURE COMPLETELY SEALED

Products built with Oyster technology do not consume oxygen by taking all the air from the environment outside so therefore can be placed inside every home properly insulated and within passive houses.



COAXIAL SMOKE DUCT

Coaxial smoke duct to evacuate the smoke and also to draw in the combustion air.



BRUSHLESS

Thanks to advanced technology, the new brushless gear motor guarantees high sound comfort (almost no noise) and substantial energy savings (consumption 90% lower compared to traditional motors). Used in the pellet loading system of all stoves.



DUAL CONNECTIVITY

2 Wi-fi modules have been designed for products equipped with Maestro technology, allowing a priority connection to your smartphone and / or handheld remote control and a second connection to the home internet network (with 2.4 GHz frequency router). For the Maestro+ products, it is possible to control the stove from a smartphone over a home Internet network (router) or through a Bluetooth connection.



KIT WI-FI EASY CONNECT

For remote connection via the app. To be installed on the back of the stove, self-powered. Compatible with a 2.4 GHz frequency Wi-Fi router.



1 / Automatic self-cleaning brazier with comb mechanism for a more effective cleaning

2 / Dedicated brushless engine

3 / Utmost combustion efficiency thanks to the electronics that defines the mechanical cleaning in regular cycles or in case of blockages

4 / Availability both on water and high power air versions (14 kW)

5 / Ash pan allowing the emptying on a weekly basis or beyond

MANY SOLUTIONS TO TAKE ADVANTAGE OF ALL THE SPACE AVAILABLE IN YOUR HOME



CONFINED SPACES

Thanks to a very limited depth, these products are particularly suitable in small rooms or hallways.




USE OF OLD FIREBOXES

These products are designed to be able to use old fireboxes that do not work and/ or do not heat, thanks to a limited height (stoves) and the possibility of being incorporated (chimneys).



USE OF EXISTING FLUES

Thanks to the presence of an upper flue outlet, these stoves can take advantage of the existing flues, thereby optimising the living space and reducing installation costs.




CORNER SOLUTIONS

Stoves designed to take advantage of the corners in a home, which are generally used very little.



WALL-MOUNTED INSTALLATIONS

This is the classic solution: installed in front of a wall (stove) or inserted into the wall (chimney), these products blend in perfectly with the architecture of the room.



SEPARATION OF ROOM

Products that have two or three exposed sides, which allow for a view of the fire from separate rooms, thereby optimising the living space.

COMBUSTION CONTROL SYSTEMS

maestro+

MAESTRO+, THE MOST ADVANCED USER EXPERIENCE

1 / DUAL CONNECTION (WI-FI AND BLUETOOTH) INCLUDED.

Everything you need to use the stove from your smartphone is already included, either at home or remotely Maestro+, without additional kits.

2 / PERFECT FLAME

The combustion with Maestro is optimal, it generates less ash and leaves the glass clean. This results in lower consumptions, lower emissions and much less frequent cleanings.

3 / MORE USER OPTIONS

Maestro stoves adapt to your style of use. When not at home you can use your smartphone (with stove connected via home Wi-Fi router), at home you can control the stove via the concealed control panel, smartphone (via Bluetooth) or remote control (optional).

4 / AUTOMATIC REMOTE FIRMWARE UPDATE


(for WI-FI connected stoves).

5 / REMOTE DIAGNOSTICS AND ASSISTANCE

(except operations that require a technician to be physically present).



MAESTRO+, THE MOST ADVANCED USER EXPERIENCE

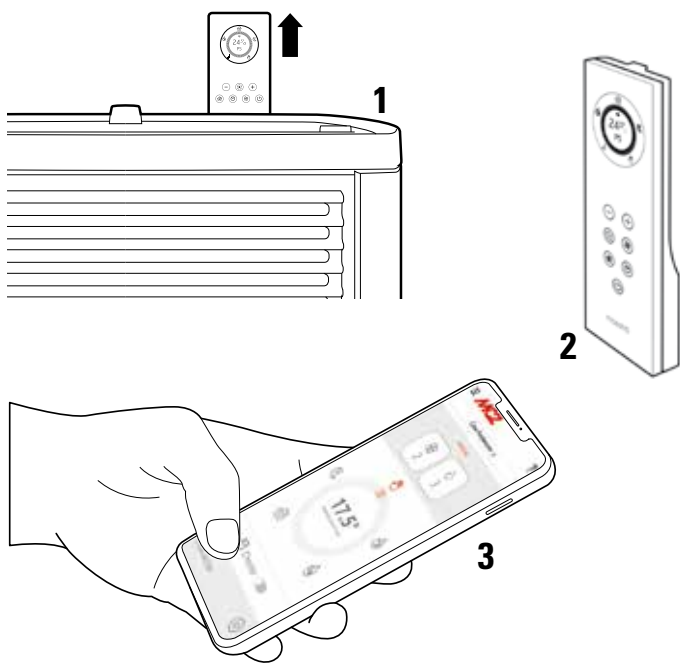

1 / DIGITAL PANEL

If you are used to a more traditional style of use, all the features of the Maestro App are also available in a new control panel (standard) that integrates the ordinary and extraordinary features (emergency panel).

2 / FREESTANDING REMOTE CONTROL

Remote control with ambient thermostat for room temperature control, always visible thanks to the e-ink display (optional).

3 / APP

For remote stove control at home and away from home, today even easier to use.

easy connect

WI-FI CONNECTIVITY FOR REMOTE CONTROL WITH "EASY CONNECT" DEDICATED APP

Exclusively for **EASY LINE products**, our range of the most user-friendly products.

TECHNOLOGIES

core



core

Core is the new firebox with patented technology that has shaken up the pellet combustion world: a wide natural flame similar to wood-fired products, one of the category's lowest emission levels, and pleasing to the eye either on or off. The CORE technology is protected by 3 patents. Designed by the very flame, the firebox no longer has all the technical parts exposed. The combustion of the gases produced by pellets is harnessed to slow down the flame and provide a unique view of the fire.

Clean glazing for long periods of time thanks to the extremely low level of emissions

Firebox with AISI 304 stainless steel core and cast iron shell

Gasification and post-combustion in several points of the combustion chamber


With its self-cleaning brazier, no brazier cleaning is required



SILENCE IS A LUXURY, TREAT YOURSELF



The Comfort and Overnight modes make operation even quieter.



Thanks to its very low smoke extraction speed, ventilation is almost imperceptible.



Available for the models:
Mako, Ego Air e Comfort
Air Matic, Musa Comfort
Air Matic 14 kW

MAKO

ONE OF THE CATEGORY'S LOWEST EMISSION LEVELS

Performance is entirely met at all operating power levels.

Core's emission levels fall widely within the strictest European limits.



TECHNOLOGIES

COMBUSTION CONTROL SYSTEMS



DUCTED AIR

DIFFUSER POSITIONABLE UP TO 8 METRES, FREELY

Comfort Air® can effectively carry the warm air (80°C) into other rooms up to a maximum distance of 8 meters. Unlike traditional systems in which the jets must be positioned at the top, Comfort Air® allows the jets to be freely positioned.

TOTAL AIR DISTRIBUTION CONTROL

Fitting an electronic control unit, Comfort Air® can control up to 2/3 air flows (in closed fireplaces) to distribute heat and convey warm air into various rooms.



EASE OF INSTALLATION AND MAINTENANCE

With a significantly smaller diameter than other models on the market (60 mm and 100 mm), Comfort Air® ensures easier installation of the funnel into the wall, consequently limiting the necessary masonry works, which often take time and are very invasive, and making the fans easier to maintain.

THE FIRST DESIGN DIFFUSERS

Comfort Air® is fitted with air distribution outlets that, for the first time, offer a true design piece. These outlets are ideal for integration into any furnishing, with their minimalist design and exclusive light and aromatherapy function that makes them unique on the market.



FORCED VENTILATION

A TRULY COMPLETE RANGE

To satisfy all requirements, in terms of power and operative functions.



WATER

HOT RADIATORS FAST

Thanks to low thermal inertia, Hydro pellet stoves, once on, are able to heat your domestic radiators in just a few minutes (for some models there are also kits for connection to the hot water system).

MAXIMUM HEAT EXCHANGE

About 90% of power rendered overall by the stove is transferred to the water guaranteeing excellent performance who those choosing radiators for domestic heating.

SYMBOLS USED



Nominal heat output




Efficiency



Diameter of smoke outlet pipe



Weight



cm A x B x C

Dimensions - width x depth x height



Fluid heat output



Minimum room volume



Hourly consumption



Fire box dimensions



Right corner



Left corner



Wall

PRODUCTS OVERVIEW












CORE	p. 15	-	-	p. 19	-	p. 26		
AIR	-	p. 16	p. 17	p. 20	p. 24	p. 28	p. 33	p. 38
COMFORT AIR	-	-	-	p. 20	p. 24	p. 28	p. 33	p. 38
HYDRO	-	-	-	p. 78	p. 79	p. 80	p. 82	p. 83
WOOD	-	-	-	-	-	-	-	-



CORE	-	-	-	-	-	-	-	-
AIR	-	-	p. 62	p. 64	-	p. 68	-	p. 72
COMFORT AIR	p. 56	p. 58	-	-	p. 66	-	p. 70	-
HYDRO	-	-	-	-	-	-	-	-
WOOD	-	-	-	-	-	-	-	-



CORE	-	-	-	-	-	-	-	-
AIR	-	-	-	-	-	-	-	-
COMFORT AIR	-	-	-	-	-	-	-	-
HYDRO	p. 106	-	-	-	-	-	-	-
WOOD	-	p. 110	p. 110	p. 111	p. 111	p. 114	p. 114	p. 115


								
DECÒ 8 kW	CUTE 8 kW	RAY 7,8 kW	STREAM 11,9 kW	PHILO 13,8 kW	DOC 8,8 kW	HALO 8,1 kW	LOOP 8 kW	MOOD 8,1 kW
-	-	-	-	-	-	-	-	-
p. 40	p. 41	-	-	-	-	p. 50	p. 52	-
-	-	p. 42	p. 44	p. 46	p. 48	-	-	p. 54
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-

								
JAZZ 28,5 kW	AKI 17,7 kW	PAD 17,7 kW	CLIO 16,1 kW	THEA 16,1 kW	VIVO 90/9 8,9 kW	VIVO 90/11 10,9 kW	BOXTHERM 60 BASIC 5,9 kW	BOXTHERM 70 BASIC 8,8 kW
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	p. 104	p. 105
-	-	-	-	-	p. 98	p. 100	-	-
p. 84	p. 86	p. 88	p. 92	p. 94	-	-	-	-
-	-	-	-	-	-	-	-	-

								
PLASMA B95 18,6 kW	PLASMA 95T 13,2 kW	PLASMA T50 18,2 kW	VIVO 90Q 11,6 kW	VIVO 70Q 11,6 kW				
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
p. 115	p. 118	p. 118	p. 121	p. 121				

CHOOSE YOUR SHAPE

SQUARE



SLIM



ROUND



MINI



INSERTS



PELLET

- AIR
- 16 Tecla
 - 17 Alyssa
 - 20 Ego
 - 24 Star
 - 28 Musa
 - 33 Club
 - 38 Suite

- COMFORT AIR
- 20 Ego
 - 24 Star
 - 28 Musa
 - 33 Club
 - 38 Suite
 - 66 Teia

- HYDRO
- 78 Ego
 - 79 Star
 - 80 Musa
 - 82 Club
 - 83 Suite
 - 84 Jazz

- CORE
- 15 Mako
 - 19 Ego
 - 26 Musa

- AIR
- 68 Alea
- COMFORT AIR
- 42 Ray
 - 44 Stream
 - 46 Philo
 - 48 Doc
 - 70 Raam

- HYDRO
- 86 Aki
 - 94 Thea

- AIR
- 50 Halo
 - 52 Loop
- COMFORT AIR
- 54 Mood
 - 56 Curve
 - 58 Flow

- HYDRO
- 88 Pad

- AIR
- 40 Decò
 - 41 Cute

- AIR
- 104 Boxtherm 60
 - 105 Boxtherm 70
- COMFORT AIR
- 98/100 Vivo 90
- HYDRO
- 106 Vivo 90 Hydro

PELLET STOVES_Air/Comfort Air Maestro

- 17 **ALYSSA** > Air
- 30 **CLUB/CLUB ABSOLUTE** > Air, Comfort Air, Comfort Air Matic
- 56 **CURVE** > Comfort Air
- 41 **CUTE** > Air
- 40 **DECÒ** > Air
- 48 **DOC** > Comfort Air
- 18 **EGO** > Core Air Matic, Air, Comfort Air
- 58 **FLOW** > Comfort Air
- 50 **HALO** > Air
- 52 **LOOP** > Air
- 14 **MAKO** > Comfort Air
- 54 **MOOD** > Comfort Air
- 26 **MUSA** > Core Air Matic, Air, Comfort Air, Comfort Air Matic
- 46 **PHILO** > Comfort Air
- 42 **RAY** > Comfort Air
- 22 **STAR** > Air, Comfort Air
- 44 **STREAM** > Comfort Air
- 36 **SUITE** > Core Air Matic, Air, Comfort Air, Comfort Air Matic
- 16 **TECLA** > Air



PELLET STOVES > Air/Comfort Air Maestro > MAKO

core



Black metal_303



Bronze metal_305

STRUCTURE

Color	Description	Code
	Black metal_303	C/Air Matic 8 M1+ Core Dark 7122011
	Bronze metal_305	C/Air Matic 8 M1+ Core Bronze 7122012

ACCESSORIES SUPPLIED AS STANDARD

	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
	Temperature probe	Supplied as standard	-
	Maestro smartphone new app	Free download	-

DEDICATED ACCESSORIES

	Comfort Air® accessories To build a Comfort Air® channelling system > p. 129		
	Pellet level sensor	4018005	
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	

MAKO

Model: MAKO COMFORT AIRMATIC 8 M1 CORE

POWER					cm A x B x C
kW 8	90,4/92,9%	Ø cm 8	kg 161	cm 50 x 55 x 111	



MATERIALS:
Steel: structure
Glass: front door
Cast iron: combustion chamber
Steel: brazier



CORE combustion chamber

PELLET STOVES > Air/Comfort Air Maestro > TECLA

DESCRIPTION/CODE



White metal_302



Dark metal_308



Silver metal_313



Bordeaux metal_304



STRUCTURE

Air 6 M1+

7122001

CLADDING

White metal_302

6919006

Dark metal_308

6919005

Silver metal_313

6919008

Bordeaux metal_304


6919007

ACCESSORIES SUPPLIED AS STANDARD



A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel

Supplied as standard



Temperature probe

Supplied as standard



Maestro smartphone new app

Free download

DEDICATED ACCESSORIES



Black "ECO" ash pan
Optional.

4017019



Pellet level sensor

4018005



Freestanding remote control
Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).

4022002



TECLA TOP CHOICE

Model: TECLA AIR 6 M1

POWER				
kW 6,3	91,5/92%	Ø cm 8	kg 90	cm A x B x C

kW 6,3 91,5/92% Ø cm 8 kg 90 cm 46 x 49 x 90



MATERIALS:
Steel: structure
Metal: painted sides
Cast iron: brazier, door, front elements, top, combustion chamber



Warm grey ceramic_113



Bordeaux ceramic_105



White ceramic_102

ALYSSA **TOP CHOICE**

Model: ALYSSA AIR 6 M1

POWER					cm A x B x C
kW 6,3	91,5/92%	Ø cm 8	kg 90	cm 46x 49 x 90	

--	--	--	--	--	--	--	--

A+

MATERIALS:
 Steel: structure
 Ceramic: sides
 Cast iron: brazier, door, front elements, top, combustion chamber

DESCRIPTION/CODE

STRUCTURE			
Air 6 M1		7122001	
CLADDING			
	Warm grey ceramic_113	6919013	
	Bordeaux ceramic_105	6919014	
	White ceramic_102	6919015	
ACCESSORIES SUPPLIED AS STANDARD			
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
	Temperature probe	Supplied as standard	-
	Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES			
	Black "ECO" ash pan Optional.	4017019	
	Pellet level sensor	4018005	
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	

EGO



core



White metal_302



Dark metal_308



Silver metal_313



Bordeaux metal_304



STRUCTURE

DESCRIPTION	DESCRIPTION/CODE
Air Matic 8 M3+ Core	7122008
Comfort Air Matic 10 M3+ Core	7122009

CLADDING



White metal_302	6921001
Dark metal_308	6921002
Silver metal_313	6921003
Bordeaux metal_304	6921004

ACCESSORIES SUPPLIED AS STANDARD

 A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
 Temperature probe	Supplied as standard	-





 Maestro smartphone new app	Free download	-
---	---------------	---








DEDICATED ACCESSORIES




 Pellet level sensor	4018005	
 Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	

EGO Air Matic CORE

Model: EGO AIRMATIC 8 M3 CORE





POWER					cm A x B x C
kW 8,0	90,4/92,9%	Ø cm 8	kg 130	cm 50 x 55 x 104	
























EGO Comfort Air Matic CORE

Model: EGO COMFORT AIRMATIC 10 M3 CORE

POWER					cm A x B x C
kW 10	90/92,9%	Ø cm 8	kg 133	cm 50 x 55 x 104	















 Conto Termico 2.0

MATERIALS:
 Stainless steel: structure and brazier
 Metal: painted sides
 Cast iron: grate, door, front elements, top

PELLET STOVES > Air/Comfort Air Maestro > EGO

		DESCRIPTION/CODE	
 White metal_302		 Dark metal_308	
 Silver metal_313		 Bordeaux metal_304	
STRUCTURE			
		Air 8 M3	7122038
		Comfort Air 10 M3	7122041
CLADDING			
		White metal_302	6921001
		Dark metal_308	6921002
		Silver metal_313	6921003
		Bordeaux metal_304	6921004
ACCESSORIES SUPPLIED AS STANDARD			
		A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard
		Temperature probe	Supplied as standard
		Maestro smartphone new app	Free download
DEDICATED ACCESSORIES			
		Pellet level sensor	4018005
		Comfort Air® accessories To build a Comfort Air® ducting system > p. 129	
		Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002

EGO Air TOP CHOICE

Model: EGO AIR 8 M3

POWER					cm A x B x C
kW 8,1	90,9/91,5%	Ø cm 8	kg 127	cm 50 x 55 x 104	
























EGO Comfort Air TOP CHOICE

Model: EGO COMFORT AIR 10 M3

POWER					cm A x B x C
kW 10	90,4/91,5%	Ø cm 8	kg 130	cm 50 x 55 x 104	





 Conto Termico 2.0

MATERIALS:
 Steel: structure, stainless steel side
 Metal: painted sides
 Cast iron: grate, door, front elements, top

PELLET STOVES > Air/Comfort Air Maestro > EGO



UP!



XUP!

EGO Air UP! TOP CHOICE EGO Air XUP! TOP CHOICE

Model: EGO AIR 8 UP! M3
Model: EGO AIR 8 XUP! M3

POWER				
kW 8,1	90,9/91,5%	Ø cm 80/130	kg 130	cm A x B x C

EGO Comfort Air UP! TOP CHOICE

Model: EGO COMFORT AIR 10 UP! M3

POWER				
kW 10	90,4/91,5%	Ø cm 8	kg 133	cm A x B x C

Conto Termico 2.0

MATERIALS:
Steel: structure, stainless steel side
Metal: painted sides
Cast iron: grate, door, front elements, top

	DESCRIPTION/CODE	
STRUCTURE		
Air 8 UP! M3	7122039	
Air 8 XUP! M3	7122040	
Comfort Air 10 UP! M3	7122042	
CLADDING		
White metal_302	6921001	
Dark metal_308	6921002	
Silver metal_313	6921003	
Bordeaux metal_304	6921004	
ACCESSORIES SUPPLIED AS STANDARD		
A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
Temperature probe	Supplied as standard	-
Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES		
Pellet level sensor	4018005	
Adapter for coaxial flues mm 80/130 x 80/125	Only for XUP! stoves	4019014
Comfort Air® accessories To build a Comfort Air® ducting system > p. 129		
Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	





PELLET STOVES > Air/Comfort Air Maestro > STAR

	DESCRIPTION/CODE	
STRUCTURE		
	Air 8 M3	7122043
	Comfort Air 10 M3	7122045
CLADDING		
	White ceramic_102	6921005
	Black ceramic_107	6921007
	Warm grey ceramic_113	6921008
ACCESSORIES SUPPLIED AS STANDARD		
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard
	Temperature probe	Supplied as standard
	Maestro smartphone new app	Free download
DEDICATED ACCESSORIES		
	Pellet level sensor	4018005
	Comfort Air® accessories To build a Comfort Air® channelling system > p. 129	
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002

White ceramic_102







Black ceramic_107













Warm grey ceramic_113

STAR Air TOP CHOICE

Model: STAR AIR 8 M3





POWER				
kW 8,1	90,9/91,5%	Ø cm 8	kg 127	cm A x B x C 50 x 55 x 105























STAR Comfort Air TOP CHOICE

Model: STAR COMFORT AIR 10 M3

POWER				
kW 10	90,4/91,5%	Ø cm 8	kg 130	cm A x B x C 50 x 55 x 105





 Conto Termico 2.0

MATERIALS:
 Cast iron: brazier, combustion chamber, door, front diffuser
 Ceramic: sides, top, front panel

PELLET STOVES > Air/Comfort Air Maestro > STAR



	DESCRIPTION/CODE	
STRUCTURE		
Air 8 UP! M3	7122044	
Comfort Air 10 UP! M3	7122046	
CLADDING		
White ceramic_102	6921005	
Black ceramic_107	6921007	
Warm grey ceramic_113	6921008	
ACCESSORIES SUPPLIED AS STANDARD		
A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
Temperature probe	Supplied as standard	-
Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES		
Pellet level sensor	4018005	
Comfort Air® accessories To build a Comfort Air® channelling system > p. 129		
Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	

STAR Air UP! TOP CHOICE

Model: STAR AIR 8 UP! M3

POWER				
kW 8,1	90,9/91,5%	Ø cm 8	kg 130	cm A x B x C cm 50 x 55 x 105

STAR Comfort Air UP!

Model: STAR COMFORT AIR 10 UP! M3

POWER				
kW 10	90,4/91,5%	Ø cm 8	kg 133	cm A x B x C cm 50 x 55 x 105

Conto Termico 2.0

MATERIALS:
 Cast iron: brazier, combustion chamber, door, front diffuser
 Ceramic: sides, top, front panel

MUSA



	DESCRIPTION/CODE	€
--	------------------	---

core



White metal_302



Dark metal_308



Silver metal_313



Bordeaux metal_304

MUSA Comfort Air Matic 14 CORE

Model: MUSA COMFORT AIRMATIC 14 M3 CORE

NEW **TOP CHOICE**

POWER					cm A x B x C
kW 14,1	90,0/93,8%	Ø cm 8	kg 183	cm 56 x 59 x 116	

A+ Conto Termico 2.0

MATERIALS:
 Stainless steel: structure and brazier
 Metal: painted sides
 Cast iron: door, front elements, top, combustion chamber



STRUCTURE		
Comfort Air Matic 14 M3+ Core	7122029	
CLADDING		
White metal_302	6921026	
Dark metal_308	6921027	
Silver metal_313	6921028	
Bordeaux metal_304	6921029	
ACCESSORIES SUPPLIED AS STANDARD		
A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
Temperature probe	Supplied as standard	-
Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES		
Pellet level sensor	4018005	
Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	

PELLET STOVES > Air/Comfort Air Maestro > MUSA



MUSA Air TOP CHOICE

Model: MUSA AIR 10 M3

POWER					cm A x B x C
kW 10	90,4/91,5%	Ø cm 8	kg 165	cm 56 x 59 x 116	

MUSA Comfort Air 12 TOP CHOICE

Model: MUSA COMFORT AIR 12 M3

POWER					cm A x B x C
kW 11,9	90,8/93,5%	Ø cm 8	kg 180	cm 56 x 59 x 116	

--	--	--	--	--	--	--	--	--

MUSA Comfort Air 14

Model: MUSA COMFORT AIR 14 M2

POWER					cm A x B x C
kW 13,8	90,5/93,2%	Ø cm 8	kg 183	cm 56 x 59 x 116	

--	--	--	--	--	--	--	--	--

MUSA Comfort Air Matic 14

Model: MUSA COMFORT AIR MATIC 14 M2

POWER					cm A x B x C
kW 13,9	90,2/92,3%	Ø cm 8	kg 183	cm 56 x 59 x 116	

--	--	--	--	--	--	--	--	--	--

A+

MATERIALS:
 Steel: structure
 Metal: painted sides
 Cast iron: brazier, door, front elements, top, combustion chamber

	DESCRIPTION/CODE	
STRUCTURE		
Air 10 M3	7122053	
Comfort Air 12 M3	7122055	
Comfort Air 14 M2+	WHILE STOCKS LAST 7121034	
Comfort Air Matic 14 M2+	WHILE STOCKS LAST 7121035	
CLADDING		
White metal_302	6921026	
Dark metal_308	6921027	
Silver metal_313	6921028	
Bordeaux metal_304	6921029	
ACCESSORIES SUPPLIED AS STANDARD		
A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
Temperature probe	Supplied as standard	-
Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES		
Pellet level sensor	4018005	
Comfort Air® accessories To build a Comfort Air® channelling system > p. 129		
Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	

PELLET STOVES > Air/Comfort Air Maestro > MUSA



MUSA Air UP!

Model: MUSA AIR 10 UP! M3

POWER					cm A x B x C
kW 10	90,4/91,5%	Ø cm 8	kg 168	cm 56 x 59 x 116	

MUSA Comfort Air 12 UP!

TOP CHOICE

Model: MUSA COMFORT AIR 12 UP! M3

POWER					cm A x B x C
kW 11,9	90,8/93,5%	Ø cm 8	kg 183	cm 56 x 59 x 116	

MUSA Comfort Air 14 UP!

Model: MUSA COMFORT AIR 14 UP! M3

POWER					cm A x B x C
kW 13,8	90,5/93,5%	Ø cm 8	kg 186	cm 56 x 59 x 116	

	DESCRIPTION/CODE	
STRUCTURE		
Air 10 UP! M3	7122054	
Comfort Air 12 UP! M3	7122056	
Comfort Air 14 UP! M3	7122057	
CLADDING		
White metal_302	6921026	
Dark metal_308	6921027	
Silver metal_313	6921028	
Bordeaux metal_304	6921029	
ACCESSORIES SUPPLIED AS STANDARD		
A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
Temperature probe	Supplied as standard	-
Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES		
X - UP! FITTING FOR COAXIAL FLUES - Ø mm 80/130 Flue fitting for airtight stoves that use the coaxial smoke duct to evacuate the smoke and also to draw in the combustion air.	4021010	
Adapter for coaxial flues mm 80/130 » 80/125	As an option if you buy the X-UP 4019014 coaxial flue connection	
Pellet level sensor	4018005	
Comfort Air® accessories To build a Comfort Air® channelling system > p. 129		
Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	

MATERIALS:
 Steel: structure
 Metal: painted sides
 Cast iron: brazier, door, front elements, top, combustion chamber







PELLET STOVES > Air/Comfort Air Maestro > CLUB



White ceramic_102



Matt Black ceramic_126

CLUB Air TOP CHOICE

Model: CLUB AIR 10 M3

POWER					cm A x B x C
-------	--	--	--	--	--------------

kW 10 90,4/91,5% Ø cm 8 kg 165 cm 56 x 55 x 116

--	--	--	--	--	--	--	--	--

CLUB Comfort Air 12 TOP CHOICE

Model: CLUB COMFORT AIR 12 M3

POWER					cm A x B x C
-------	--	--	--	--	--------------

kW 11,9 90,8/93,5% Ø cm 8 kg 180 cm 56 x 55 x 116

--	--	--	--	--	--	--	--	--

CLUB Comfort Air 14

Model: CLUB COMFORT AIR 14 M2

POWER					cm A x B x C
-------	--	--	--	--	--------------

kW 13,8 90,5/93,2% Ø cm 8 kg 183 cm 56 x 55 x 116

--	--	--	--	--	--	--	--	--

CLUB Comfort Air Matic 14

Model: CLUB COMFORT AIR MATIC 14 M2

POWER					cm A x B x C
-------	--	--	--	--	--------------

kW 13,9 90,2/92,3% Ø cm 8 kg 183 cm 56 x 55 x 116

--	--	--	--	--	--	--	--	--	--

A+ Conto Termico 2.0

MATERIALS:
 Cast iron: brazier, combustion chamber, door, front diffuser
 Ceramic: sides, top, front panel

		DESCRIPTION/CODE	
STRUCTURE			
	Air 10 M3	7122049	
	Comfort Air 12 M3	7122051	
	Comfort Air 14 M2+	WHILE STOCKS LAST	7121020
	Comfort Air Matic 14 M2+	WHILE STOCKS LAST	7121021
CLADDING CLUB			
	White ceramic_102	6921018	
	Matt Black ceramic_126	6921020	
CLADDING CLUB ABSOLUTE			
	126_Matt Black + 308_Dark (1)	See photo on page 35	6922021
	102_White + 308_Dark (2)	See photo on page 35	6922022
	126_Matt Black + 302_White (3)	See photo on page 35	6922023
ACCESSORIES SUPPLIED AS STANDARD			
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
	Temperature probe	Supplied as standard	-
	Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES			
	Pellet level sensor	4018005	
	Comfort Air® accessories To build a Comfort Air® ducting system > p. 129		
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	

PELLET STOVES > Air/Comfort Air Maestro > CLUB



CLUB Air UP!

Model: CLUB AIR 10 UP! M3

POWER				
kW 10	90,4/91,5%	Ø cm 8	kg 168	cm 56 x 55 x 116

CLUB Comfort Air 12 UP!

Model: CLUB COMFORT AIR 12 UP! M3

POWER				
kW 11,9	90,8/93,5%	Ø cm 8	kg 183	cm 56 x 55 x 116

Conto Termico 2.0

MATERIALS:
 Cast iron: brazier, combustion chamber, door, front diffuser
 Ceramic: sides, top, front panel

		DESCRIPTION/CODE	
STRUCTURE			
	Air 10 UP! M3	7122050	
	Comfort Air 12 UP! M3	7122052	
CLADDING CLUB			
	White ceramic_102	6921018	
	Matt Black ceramic_126	6921020	
CLADDING CLUB ABSOLUTE			
	126_Matt Black + 308_Dark (1)	See photo on page 35	6922021
	102_White + 308_Dark (2)	See photo on page 35	6922022
	126_Matt Black + 302_White (3)	See photo on page 35	6922023
ACCESSORIES SUPPLIED AS STANDARD			
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
	Temperature probe	Supplied as standard	-
	Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES			
	X - UP! FITTING FOR COAXIAL FLUES - Ø mm 80/130 Flue fitting for airtight stoves that use the coaxial smoke duct to evacuate the smoke and also to draw in the combustion air.	4021006	
	Adapter for coaxial flues mm 80/130 » 80/125	As an option if you buy the X-UP coaxial flue connection	4019014
	Pellet level sensor	4018005	
	Comfort Air® accessories To build a Comfort Air® ducting system > p. 129		
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	

CLUB ABSOLUTE > Metal sides



(1)

126_Matt Black + 308_Dark (1)



(2)

102_White + 308_Dark (2)



(3)

126_Matt Black + 302_White (3)



SUITE





PELLET STOVES > Air/Comfort Air Maestro > SUITE



Warm Grey ceramic_113



Bordeaux ceramic_105

SUITE Air TOP CHOICE

Model: SUITE AIR 10 M3

POWER					cm A x B x C
-------	--	--	--	--	--------------

kW 10 90,4/91,5% Ø cm 8 kg 165 cm 56 x 55 x 116



SUITE Comfort Air 12 TOP CHOICE

Model: SUITE COMFORT AIR 12 M3

POWER					cm A x B x C
-------	--	--	--	--	--------------

kW 11,9 90,8/93,5% Ø cm 8 kg 180 cm 56 x 55 x 116



SUITE Comfort Air 14

Model: SUITE COMFORT AIR 14 M2

POWER					cm A x B x C
-------	--	--	--	--	--------------

kW 13,8 90,5/93,2% Ø cm 8 kg 183 cm 56 x 55 x 116



SUITE Comfort Air Matic 14

Model: SUITE COMFORT AIR MATIC 14 M2

POWER					cm A x B x C
-------	--	--	--	--	--------------

kW 13,9 90,2/92,3% Ø cm 8 kg 183 cm 56 x 55 x 116



MATERIALS:
Cast iron: brazier, combustion chamber, door, front diffuser
Ceramic: sides, top, front panel

STRUCTURE

Air 10 M3	7122049
Comfort Air 12 M3	7122051
Comfort Air 14 M2+	WHILE STOCKS LAST 7121020
Comfort Air Matic 14 M2+	WHILE STOCKS LAST 7121021

CLADDING

Warm Grey ceramic_113	6921017
Bordeaux ceramic_105	6921015

ACCESSORIES SUPPLIED AS STANDARD

	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
--	--	----------------------	---

	Temperature probe	Supplied as standard	-
--	--------------------------	----------------------	---

	Maestro smartphone new app	Free download	-
--	-----------------------------------	---------------	---

DEDICATED ACCESSORIES

	Pellet level sensor	4018005	
--	----------------------------	---------	--

	Comfort Air® accessories To build a Comfort Air® ducting system > p. 129		
--	--	--	--

	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	
--	---	---------	--

PELLET STOVES > Air/Comfort Air Maestro > SUITE



SUITE Air UP!

Model: SUITE AIR 10 UP! M3

POWER				
kW 10	90,4/91,5%	Ø cm 8	kg 168	cm A x B x C cm 56 x 55 x 116

SUITE Comfort Air 12 UP!

Model: SUITE COMFORT AIR 12 UP! M3

POWER				
kW 11,9	90,8/93,5%	Ø cm 8	kg 183	cm A x B x C cm 56 x 55 x 116

Conto Termico 2.0

MATERIALS:
 Cast iron: brazier, combustion chamber, door, front diffuser
 Ceramic: sides, top, front panel

	DESCRIPTION/CODE	
STRUCTURE		
Air 10 UP! M3	7122050	
Comfort Air 12 UP! M3	7122052	
CLADDING		
Warm Grey ceramic_113	6921017	
Bordeaux ceramic_105	6921015	
ACCESSORIES SUPPLIED AS STANDARD		
A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
Temperature probe	Supplied as standard	-
Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES		
X - UP! FITTING FOR COAXIAL FLUES - Ø mm 80/130 Flue fitting for airtight stoves that use the coaxial smoke duct to evacuate the smoke and also to draw in the combustion air.	4021006	
Adapter for coaxial flues mm 80/130 x 80/125	As an option if you buy the X-UP coaxial flue connection	4019014
Pellet level sensor		4018005
Comfort Air® accessories To build a Comfort Air® ducting system > p. 129		
Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).		4022002

PELLET STOVES > Air/Comfort Air Maestro > DECÒ



DECÒ

Model: DECÒ AIR 8 M1

POWER				
kW 8	92,7/94,3%	Ø cm 8/10	kg 200	cm 75 x 56 x 81

--	--	--	--	--	--	--

Conto Termico 2.0

MATERIALS:
 Steel: structure
 Cast iron: cladding, brazier, combustion chamber, door

VERSIONS		DESCRIPTION/CODE
	Air 8 M1+	7122005
ACCESSORIES SUPPLIED AS STANDARD		
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard
	Temperature probe	Supplied as standard
	Maestro smartphone new app	Free download
DEDICATED ACCESSORIES		
	Pellet level sensor	4018005
	Rear smoke outlet kit Ø 8 cm	Smoke 4019015
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002
	Pipes and accessories for connection Ø 10 cm	Straight pellet pipe L 25 cm 40A11005 Straight pellet pipe L 50 cm 40A11006 Straight pellet pipe L 100 cm 40A11007 90° bend 40A11003 "T"joint 40A11004 45° bend 40A12018 90° bend that is easy to inspect 40A12019 Pipe clamp 40A12020 Rose 40A12021 Silicone gasket - Pack of 5 pieces 40A12022 Joint F/F - Ø 10/10 cm 4013009 Joint F/F - Ø 8/8 cm 4013010

PELLET STOVES > Air/Comfort Air Maestro > CUTE



CUTE

Model: CUTE AIR 8 M1

POWER				
kW 8	92,7/94,3%	Ø cm 8/10	kg 145	cm A x B x C





























































--	--	--	--	--	--	--

A+ Conto Termico 2.0

MATERIALS:
 Steel: structure - Metal: painted metal cladding
 Cast iron: brazier, door - Alutec®: firebox

VERSIONS		DESCRIPTION/CODE	
	Air 8 M1+	7122002	
ACCESSORIES SUPPLIED AS STANDARD			
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
	Temperature probe	Supplied as standard	-
	Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES			
	Pellet level sensor	4018005	
	Part of the top - Cute/Thema In the case of installation with a rear smoke outlet	4019010	
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	
	Pipes and accessories for connection Ø 10 cm	Straight pellet pipe L 25 cm 40A11005 Straight pellet pipe L 50 cm 40A11006 Straight pellet pipe L 100 cm 40A11007 90° bend 40A11003 *T*joint 40A11004 45° bend 40A12018 90° bend that is easy to inspect 40A12019 Pipe clamp 40A12020 Rose 40A12021 Silicone gasket - Pack of 5 pieces 40A12022 Joint F/F - Ø 10/10 cm 4013009 Joint F/F - Ø 8/8 cm 4013010	

PELLET STOVES > Air/Comfort Air Maestro > RAY

	DESCRIPTION/CODE	
	STRUCTURE	
	Comfort Air 8 REAR M2	7122064
	Comfort Air 8 UP! M2	7122065
	Comfort Air 8 XUP! M2	7122066
	CERAMIC OR STONE CLADDINGS	
	White ceramic_102	6918009
	Bordeaux ceramic_105 (Photo)	6918010
	Black ceramic_107	6918011
	Serpentino_240	6918012
	METAL CLADDINGS	
	Dark metal_308	6920031
	White metal_302	6920032
	Bordeaux metal_304 (as in photo)	6920033
	ACCESSORIES SUPPLIED AS STANDARD	
	 A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard
	 Temperature probe	Supplied as standard
	 Maestro smartphone new app	Free download
	DEDICATED ACCESSORIES	
	 Comfort Air® accessories To build a Comfort Air® ducting system > p. 129	
	 Pellet level sensor	4018005
	 Adapter for coaxial flues mm 80/130 » 80/125	Only for the X-UP version 4019014
	 Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002
 TOP CHOICE Model: RAY COMFORT AIR 8 M2	POWER      cm A x B x C kW 7,8 90,2/91% Ø cm 8 kg 155 cm 88,2 x 28,6 x 114	
      		
 		
 TOP CHOICE Model: RAY COMFORT AIR 8 UP! M2	POWER      cm A x B x C kW 7,8 90,2/91% Ø cm 8 kg 155 cm 88,2 x 28,6 x 114	
       		
 		
 Model: RAY COMFORT AIR 8 XUP! M2	POWER      cm A x B x C kW 7,8 90,2/91% Ø cm 80/130 kg 155 cm 88,2 x 28,6 x 114	
        		
 		
    Conto Termico 2.0		
MATERIALS: Steel: structure, front cladding Cast iron: brazier, combustion chamber, door Serpentine: front cladding Ceramic: front cladding		



White ceramic_102



Bordeaux ceramic_105



Black ceramic_107



Serpentino_240



Dark metal_308



White metal_302



Bordeaux metal_304



PELLET STOVES > Air/Comfort Air Maestro > STREAM



Serpentino_240

STREAM TOP CHOICE

Model: STREAM COMFORT AIR 12 M2

POWER					cm A x B x C
kW 11,9	90,8/93,5%	Ø cm 8	kg 180/235	cm 91 x 39 x 113	

STREAM UP! TOP CHOICE

Model: STREAM COMFORT AIR 12 UP! M2

POWER					cm A x B x C
kW 11,9	90,8/93,5%	Ø cm 8	kg 180/235	cm 91 x 39 x 113	

MATERIALS:
 Steel: structure, front cladding
 Glass: door
 Cast iron: brazier, combustion chamber
 Serpentine: front cladding

	DESCRIPTION/CODE	
STRUCTURE		
Comfort Air 12 M2	7122058	
Comfort Air 12 UP! M2	7122059	
CLADDINGS		
Dark metal_308	6920058	
White metal_302	(as in photo)	6920056
Bordeaux metal_304	6920057	
Serpentino_240	6920059	
ACCESSORIES SUPPLIED AS STANDARD		
A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
Temperature probe	Supplied as standard	-
Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES		
Comfort Air® accessories To build a Comfort Air® channelling system > p. 129		
Pellet level sensor	4018005	
Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	



Dark metal_308



White metal_302



Bordeaux metal_304



STREAM



Air flows adjustable as needed.



PELLET STOVES > Air/Comfort Air Maestro > PHILO



Black metal_303



Bronze metal_305



White metal_302



Aluminium metal_315



Bordeaux metal_304

PHILO

Model: PHILO COMFORT AIR 14 M2

POWER				
kW 13,8	90,5/93,5%	Ø cm 8	kg 200	cm A x B x C 99,9 x 39,6 x 119

PHILO UP!

Model: PHILO COMFORT AIR 14 UP!M2

POWER				
kW 13,8	90,5/93,5%	Ø cm 8	kg 200	cm A x B x C 99,9 x 39,6 x 119

MATERIALS:
 Steel: structure
 Cast iron: top, brazier, combustion chamber
 Metal: cladding,
 Aluminum: hot air diffuser under the top

	DESCRIPTION/CODE	
STRUCTURE		
Comfort Air 14 M2	7122060	
Comfort Air 14 UP! M2	7122061	
CLADDING		
	Black metal_303	6922002
	Bronze metal_305	6922005
	White metal_302	6922001
	Aluminium metal_315	6922003
	Bordeaux metal_304	6922004
ACCESSORIES SUPPLIED AS STANDARD		
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard
	Temperature probe	Supplied as standard
	Maestro smartphone new app	Free download
DEDICATED ACCESSORIES		
	Pellet level sensor	4018005
	Comfort Air® accessories To build a Comfort Air® ducting system > p. 129	
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002











PELLET STOVES > Air/Comfort Air Maestro > DOC



Black metal_303

















Aluminium metal_315

	DESCRIPTION/CODE	
STRUCTURE		
Comfort Air 9 M2	7122069	
Comfort Air 9 UP! M2	7122070	
TOP		
 Black metal_303	6917015	
 Aluminium metal_315	6917016	
ACCESSORIES SUPPLIED AS STANDARD		
 A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
 Temperature probe	Supplied as standard	-
 Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES		
 Pellet level sensor	4018005	
 Comfort Air® accessories To build a Comfort Air® ducting system > p. 129		
 Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	

DOC





Model: DOC COMFORT AIR 9 M2












POWER					cm A x B x C
kW 8,8	90,9/89,8%	Ø cm 8	kg 148	cm 86 x 30 x 114	

DOC UP!

Model: DOC COMFORT AIR 9 UP! M2

POWER					cm A x B x C
kW 8,8	90,9/89,8%	Ø cm 8	kg 148	cm 86 x 30 x 114	






MATERIALS:
 Steel: structure
 Cast iron: top, brazier, combustion chamber
 Metal: cladding

PELLET STOVES > Air/Comfort Air Maestro > HALO

		DESCRIPTION/CODE	
STRUCTURE			
Air 8 M2		7122076	
CLADDING			
	Black metal_303	6916015	
	Silver metal_313	6916016	
	Aluminium metal_315	6916017	
	Bordeaux metal_304	6916018	
ACCESSORIES SUPPLIED AS STANDARD			
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel		-
	Temperature probe		-
	Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES			
	Pellet level sensor	4018005	
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	



Black metal_303



Silver metal_313



Aluminium metal_315







Bordeaux metal_304



HALO **TOP CHOICE**

Model: HALO AIR 8 M2

POWER				
kW 8,1	90,9/91,5%	Ø cm 8	kg 130	cm A x B x C












Conto Termico 2.0

MATERIALS:
Steel: structure
Cast iron: brazier, combustion chamber





PELLET STOVES > Air/Comfort Air Maestro > HALO












	DESCRIPTION/CODE	
STRUCTURE		
Air 8 UP! M2	7122022	
CLADDING		
 Black metal_303	6916015	
 Silver metal_313	6916016	
 Aluminium metal_315	6916017	
 Bordeaux metal_304	6916018	
ACCESSORIES SUPPLIED AS STANDARD		
 Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display.		
 Temperature probe		-
 Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES		
 Pellet level sensor	4018005	
 X - UP! FITTING FOR COAXIAL FLUES - Ø mm 80/130 Flue fitting for airtight stoves that use the coaxial smoke duct to evacuate the smoke and also to draw in the combustion air.	4021011	

HALO UP! TOP CHOICE NEW

Model: HALO AIR 8 UP! M2

POWER				
kW 8,1	90,9/91,5%	Ø cm 8	kg 130	cm A x B x C

A+



Conto Termico 2.0

MATERIALS:
 Steel: structure
 Cast iron: brazier, combustion chamber

LOOP



PELLET STOVES > Air/Comfort Air Maestro > LOOP



LOOP

Model: LOOP AIR 8 M2

POWER				
kW 8	90,4/92%	Ø cm 8	kg 170	cm A x B x C

cm 54 x 55 x 107

Conto Termico 2.0

MATERIALS:
 Steel: structure
 Metal: painted sides
 Cast iron: brazier, door, front elements, top, combustion chamber

		DESCRIPTION/CODE	
VERSIONS			
	Black metal_303	Air Black 8 M2	7122094
ACCESSORIES SUPPLIED AS STANDARD			
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel		-
	Temperature probe		-
	Maestro smartphone new app		Free download
DEDICATED ACCESSORIES			
	Black "ECO" ash pan Optional.		4017019
	Pellet level sensor		4018005
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).		4022002

MOOD



PELLET STOVES > Air/Comfort Air Maestro > MOOD



Black metal_303



Bronze metal_305

MOOD NEW

Model: MOOD COMFORT AIR 8 M2

POWER				
kW 8,1	90,9/91,5%	Ø cm 8	kg 132	cm A x B x C 52 x 52 x 120

A+

 Conto Termico 2.0

MATERIALS:
 Steel: structure
 Glass: door
 Aluminium: top
 Cast iron: brazier, combustion chamber

VERSIONS

	Black metal_303	Comfort Air Black 8 M2	7122024
	Bronze metal_305	Comfort Air Bronze 8 M2	7122026




ACCESSORIES SUPPLIED AS STANDARD

	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display.		
	Temperature probe		-
	Maestro smartphone new app	Free download	-

DEDICATED ACCESSORIES

	Comfort Air® accessories To build a Comfort Air® channelling system > p. 129		
	Black "LOW" ash pan Optional.	4017018	
	Pellet level sensor	4018005	

PELLET STOVES > Air/Comfort Air Maestro > CURVE

		DESCRIPTION/CODE				
 						
<p>Black ceramic_107</p> <p>Warm grey ceramic_113</p>						
 						
<p>Bordeaux ceramic_105</p> <p>White ceramic_102</p>						
<p>CURVE NEW</p> <p>Model: CURVE COMFORT AIR 8 M2</p>						
<p>POWER</p> <p>kW 8,1</p>						
<p>%</p> <p>90,9/91,5%</p>						
<p>Ø cm 8</p>						
<p>Kg</p> <p>kg 170</p>						
<p>cm A x B x C</p> <p>cm 56 x 56 x 120</p>						
<p>maestro</p> <p>no air</p> <p>comfort air</p> <p>xi</p> <p>quick start</p> <p>oyster</p> <p>brush less</p>						
<p>A+</p> <p>ECODESIGN 2022</p> <p>7*</p> <p>aria PULITA</p> <p>Conto Termico 2.0</p>						
<p>MATERIALS:</p> <p>Glass: front door</p> <p>Cast iron: brazier, combustion chamber</p> <p>Ceramic: cladding</p>						
<p>STRUCTURE</p> <p>Comfort Air 8 M2</p>		7122023				
<p>CLADDING</p> <p>Black ceramic_107</p> <p>Warm grey ceramic_113</p> <p>Bordeaux ceramic_105</p> <p>White ceramic_102</p>		6916001	6916002	6916003	6916019	
<p>ACCESSORIES SUPPLIED AS STANDARD</p> <p> Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display.</p> <p> Temperature probe</p> <p> Maestro smartphone new app</p>					Free download	
<p>DEDICATED ACCESSORIES</p> <p> Comfort Air® accessories To build a Comfort Air® channelling system > p. 129</p> <p> Black "LOW" ash pan Optional.</p> <p> Pellet level sensor</p>					4017018	4018005

CURVE



PELLET STOVES > Air/Comfort Air Maestro > FLOW

		DESCRIPTION/CODE			
					
					
<p>Plain White Ceramic_102 Plain Black Ceramic_107</p>					
					
					
<p>Line White Ceramic_102 Line Bordeaux Ceramic_105</p>					
<h2>FLOW Comfort Air 10 NEW</h2> <p>Model: FLOW COMFORT AIR 10 M2</p>					
<p>POWER cm A x B x C</p> <p>kW 10 90,4/91,5% Ø cm 8 kg 130 Ø cm 54 x 123</p>					
<p> </p> <p> </p>					
<p>A+ Conto Termico 2.0</p>					
<p>MATERIALS: Steel: structure, top Ceramic: sides Cast iron: brazier, combustion chamber Aluminium: cladding</p>					
<h3>STRUCTURE</h3> <p>Comfort Air 10 M2</p>		7122027			
<h3>CLADDINGS</h3> <p>Plain White Ceramic_102</p> <p>Plain Black Ceramic_107</p> <p>Line White Ceramic_102</p> <p>Line Bordeaux Ceramic_105</p>		6920017	6920018	6920019	6920020
<h3>ACCESSORIES SUPPLIED AS STANDARD</h3>					
 <p>Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display.</p>					
 <p>Temperature probe</p>					
 <p>Maestro smartphone new app</p>		Free download			
<h3>TEMPERATURE PROBES</h3>					
 <p>Temperature probe featured as standard on the machine</p>		Supplied as standard			
<h3>DEDICATED ACCESSORIES</h3>					
 <p>Comfort Air® accessories To build a Comfort Air® channelling system > p. 129</p>					
 <p>Pellet level sensor</p>		4018005			



FLOW

PELLET STOVES > Air/Comfort Air Maestro > STOVES WITH SMOKE OUTLET REAR, UP!, XUP!

<p>Ego · Ego UP! · Ego XUP! / p. 18</p>  <p>REAR UP! XUP!</p>	<p>Star · Star UP! / p. 22</p>  <p>REAR UP!</p>	<p>Musa · Musa UP! / p. 26</p>  <p>REAR UP!</p>
<p>Club · Club UP! / p. 30</p>  <p>REAR UP!</p>	<p>Suite · Suite UP! / p. 36</p>  <p>REAR UP!</p>	<p>Decò / p. 40</p>  <p>REAR UP!</p>
<p>Cute / p. 41</p>  <p>REAR UP!</p>	<p>Doc · Doc UP! / p. 48</p>  <p>REAR UP!</p>	<p>Philo · Philo UP! / p. 46</p>  <p>REAR UP!</p>
<p>Ray · Ray UP! · Ray XUP! / p. 42</p>  <p>REAR UP! XUP!</p>	<p>Stream · Stream UP! / p. 44</p>  <p>REAR UP!</p>	<p>Halo · Halo UP! / p. 50</p>  <p>REAR UP!</p>

PELLET STOVES_Air/Comfort Air Easy

- 68 ALEA > Air
- 62 GHEA > Air
- 72 HERA > Air
- 64 MIDA > Air
- 70 RAAM > Comfort Air
- 66 TEIA > Comfort Air

PELLET STOVES > Air/Comfort Air Easy > GHEA

DESCRIPTION/CODE



White metal_302



Dark metal_308



Silver metal_313



Bordeaux metal_304



STRUCTURE

GHEA Air 6 S1	7122014
GHEA Air 6 XUP! S1	7122013

CLADDING

White metal_302	6922008
Dark metal_308	6922006
Silver metal_313	6922007
Bordeaux metal_304	6922009

ACCESSORIES SUPPLIED AS STANDARD

Temperature probe	Supplied as standard
--------------------------	----------------------

DEDICATED ACCESSORIES

Remote control Optional.	4015012
Kit Wi-Fi Easy Connect For remote connection via the app. To be installed on the back of the stove, self-powered. Compatible with a 2.4 GHz frequency Wi-Fi router.	4020003
Adapter for coaxial flues mm 80/130 » 80/125	Only for the X-UP version 4019014

GHEA Air TOP CHOICE

Model: GHEA AIR 6 S1

POWER				
kW 6,3	91/96,9%	Ø cm 8	kg 100	cm A x B x C 46 x 48 x 97

air
 no air

 oyster
 kit wi-fi

GHEA Air UP/XUP! TOP CHOICE

Model: GHEA AIR 6 XUP! S1

POWER				
kW 6,3	91/96,9%	Ø cm 80/130	kg 103	cm A x B x C 46 x 48 x 97

air
 no air

 oyster
 kit wi-fi

easy connect

Conto Termico 2.0

MATERIALS:
 Steel: structure
 Metal: painted sides, front elements
 Cast iron: brazier, combustion chamber, top, door



MIDA



PELLET STOVES > Air/Comfort Air Easy > MIDA



White metal_302



Dark metal_308



Silver metal_313



Bordeaux metal_304

MIDA Air TOP CHOICE

Model: MIDA AIR 8 S1

POWER					cm A x B x C
kW 8,3	91/96,9%	Ø cm 8	kg 102	cm 46 x 48 x 102	

air	no air		oyster		kit wi-fi

MIDA Air UP/XUP!

Model: MIDA AIR 8 XUP! S1

POWER					cm A x B x C
kW 8,3	91/96,9%	Ø cm 80/130	kg 105	cm 46 x 48 x 102	

air	no air		oyster			kit wi-fi	

easy connect

A+				Conto Termico 2.0
-----------	--	--	--	-------------------

MATERIALS:
 Steel: structure
 Metal: painted sides, front elements
 Cast iron: brazier, combustion chamber, top, door

		DESCRIPTION/CODE
STRUCTURE		
	MIDA Air 8 S1	7122016
	MIDA Air 8 XUP! S1	7122015
CLADDING		
	White metal_302	6922012
	Dark metal_308	6922010
	Silver metal_313	6922011
	Bordeaux metal_304	6922013
ACCESSORIES SUPPLIED AS STANDARD		
	Temperature probe	Supplied as standard
DEDICATED ACCESSORIES		
	Remote control Optional.	4015012
	Kit Wi-Fi Easy Connect For remote connection via the app. To be installed on the back of the stove, self-powered. Compatible with a 2.4 GHz frequency Wi-Fi router.	4020003
	Adapter for coaxial flues mm 80/130 » 80/125	Only for the X-UP version 4019014

PELLET STOVES > Air/Comfort Air Easy > TEIA



Dark metal_308



White metal_302



Bordeaux metal_304


STRUCTURE

Model	Code
TEIA Comfort Air 10 S2	7122062
TEIA Comfort Air 10 UP! S2	7122063





CLADDING

Color	Material	Finish	Code
Dark metal_308	Dark metal_308	Ductable	6922014
White metal_302	White metal_302	Ductable	6922015
Bordeaux metal_304	Bordeaux metal_304	Ductable	6922016

ACCESSORIES SUPPLIED AS STANDARD





 °C	Temperature probe	Supplied as standard
--	--------------------------	----------------------









DEDICATED ACCESSORIES

	Remote control Optional.	4015012
	Kit Wi-Fi Easy Connect For remote connection via the app. To be installed on the back of the stove, self-powered. Compatible with a 2.4 GHz frequency Wi-Fi router.	4020003
	Black "LOW" ash pan Optional.	4017018
	Comfort Air® accessories To build a Comfort Air® channelling system > p. 129	

TEIA Comfort Air TOP CHOICE





Model: TEIA COMFORT AIR 10 S2










POWER				
kW 10	90,4/91,5%	Ø cm 8	kg 132	cm A x B x C 48 x 53,3 x 113

TEIA Comfort Air UP!

Model: TEIA COMFORT AIR 10 UP! S2

POWER				
kW 10	90,4/91,5%	Ø cm 8	kg 135	cm A x B x C 48 x 53,3 x 113

easy connect





 Conto Termico 2.0




MATERIALS:
 Steel: structure
 Metal: painted sides
 Cast iron: brazier, door, front elements, top, combustion chamber



ALEA



PELLET STOVES > Air/Comfort Air Easy > ALEA

		DESCRIPTION/CODE	
STRUCTURE			
ALEA Air 7 S1		7121060	
ALEA Air 7 S1 XUP!		7121059	
CLADDINGS			
	Dark metal_308	6921042	
	White metal_302	6921040	
	Bordeaux metal_304	6921043	
	Silver metal_313	6921041	
ACCESSORIES SUPPLIED AS STANDARD			
	Temperature probe	Supplied as standard	-
DEDICATED ACCESSORIES			
	Remote control Optional.	4015012	
	Kit Wi-Fi Easy Connect For remote connection via the app. To be installed on the back of the stove, self-powered. Compatible with a 2.4 GHz frequency Wi-Fi router.	4020003	
PIPES REQUIRED FOR INSTALLATION			
	90° Curve Painted curve with silicone gasket for installation with rear smoke outlet.	∅ cm 8	4022008



Dark metal_308



White metal_302












Bordeaux metal_304



Silver metal_313










ALEA Air TOP CHOICE

Model: ALEA AIR 7 S1

POWER				
kW 7,0	89,5/93%	∅ cm 8	kg 60	cm A x B x C 70,3 x 27,5 x 94
				
no air	oyster		kit wi-fi	kit wi-fi

ALEA Air UP/XUP!

Model: ALEA AIR 7 S1 XUP!

POWER				
kW 7,0	89,5/93%	∅ cm 80/130	kg 65	cm A x B x C 70,3 x 27,5 x 94
				
no air	oyster		kit wi-fi	kit wi-fi

easy connect

				Conto Termico 2.0
---	---	---	---	-------------------

MATERIALS:
Steel: structure, front cladding
Cast iron: brazier, combustion chamber, door

PELLET STOVES > Air/Comfort Air Easy > RAAM

RAAM

Model: RAAM COMFORT AIR 8 S2

POWER				
kW 7,8	90,2/91%	Ø cm 8	kg 148	cm 88,8 x 28,2 x 113

--	--	--	--	--	--

RAAM UP!

Model: RAAM COMFORT AIR 8 UP! S1

POWER				
kW 7,8	90,2/91%	Ø cm 8	kg 148	cm 88,8 x 28,2 x 113

--	--	--	--	--	--

easy connect

				Conto Termico 2.0
--	--	--	--	-------------------

MATERIALS:
Steel: structure, front cladding
Cast iron: brazier, combustion chamber, door

STRUCTURE

Comfort Air 8 S2	7122067
Comfort Air 8 UP! S2	7122097

CLADDINGS

White metal_302	6918005
Dark metal_308	6918006
Silver metal_313	6918007
Bordeaux metal_304	6918008

ACCESSORIES SUPPLIED AS STANDARD

Temperature probe	Supplied as standard
--------------------------	----------------------

DEDICATED ACCESSORIES

Remote control Optional.	4015012
Kit Wi-Fi Easy Connect For remote connection via the app. To be installed on the back of the stove, self-powered. Compatible with a 2.4 GHz frequency Wi-Fi router.	4020003

Comfort Air® accessories To build a Comfort Air® channelling system > p. 129	
--	--

RAAM



White metal_302



Dark metal_308









Silver metal_313



Bordeaux metal_304













PELLET STOVES > Air/Comfort Air Easy > HERA

		DESCRIPTION/CODE	
 Dark metal_308		STRUCTURE HERA AIR 7 XUP! S1 WHILE STOCKS LAST 7121025	
		CLADDING Dark metal_308 6921013 White metal_302 6921011 Bronze metal_305 6921010 Silver metal_313 6921012	
 White metal_302		ACCESSORIES SUPPLIED AS STANDARD  Temperature probe Supplied as standard	
		DEDICATED ACCESSORIES  Remote control Optional. 4015012	
 Bronze metal_305		 Kit Wi-Fi Easy Connect For remote connection via the app. To be installed on the back of the stove, self-powered. Compatible with a 2.4 GHz frequency Wi-Fi router. 4020003	
		 Adapter for coaxial flues mm 80/130 » 80/125 Only for the X-UP version 4019014	
 Silver metal_313			

HERA Air UP/XUP! TOP CHOICE

Model: HERA AIR 7 XUP! S1

POWER				
kW 7,0	89/93%	Ø cm 80/130	kg 105	cm A x B x C

easy connect

A⁺



 Conto Termico 2.0

MATERIALS:
 Steel: structure, painted sides, front elements
 Cast iron: combustion chamber, top

PELLET STOVES > Air/Comfort Air Easy > HERA

HERA Air UP/XUP! TOP CHOICE NEW

Model: HERA AIR 8 XUP! S1

POWER					cm A x B x C
--------------	--	--	--	--	--------------

kW 8,3 91/96,9% Ø cm 80/130 kg 105 cm 53 x 54 x 105



easy connect



MATERIALS:
Steel: structure, painted sides, front elements
Cast iron: combustion chamber, top

STRUCTURE

HERA AIR 8 XUP! S1	7122077
--------------------	---------

CLADDING

	Dark metal_308	6921013
	White metal_302	6921011
	Bronze metal_305	6921010
	Silver metal_313	6921012

ACCESSORIES SUPPLIED AS STANDARD

	Temperature probe	Supplied as standard
--	--------------------------	----------------------

DEDICATED ACCESSORIES

	Remote control Optional.	4015012
	Kit Wi-Fi Easy Connect For remote connection via the app. To be installed on the back of the stove, self-powered. Compatible with a 2.4 GHz frequency Wi-Fi router.	4020003
	Adapter for coaxial flues mm 80/130 x 80/125	Only for the X-UP version 4019014



PELLET STOVES > Air/Comfort Air Easy > STOVES WITH SMOKE OUTLET REAR or UP/XUP!

<p>Ghea · Ghea XUP! / p. 62</p>  <p>REAR </p> <p>XUP! </p>	<p>Mida · Mida XUP! / p. 64</p>  <p>REAR </p> <p>XUP! </p>	<p>Teia · Teia UP! / p. 66</p>  <p>REAR </p> <p>UP! </p>
<p>Alea · Alea XUP! / p. 68</p>  <p>REAR </p> <p>XUP! </p>	<p>Raam · Raam UP! · Raam XUP! p. 70</p>  <p>REAR </p> <p>UP! </p>	<p>Hera XUP! / p. 72</p>  <p>XUP! </p>

PELLET STOVES_Hydro Maestro

- 86 AKI > Hydromatic
- 82 CLUB > Hydromatic
- 78 EGO > Hydromatic
- 84 JAZZ > Hydromatic
- 80 MUSA > Hydromatic
- 88 PAD > Hydromatic
- 79 STAR > Hydromatic
- 83 SUITE > Hydromatic





EGO
Hydromatic



STAR
Hydromatic



MUSA
Hydromatic



CLUB
CLUB ABSOLUTE
Hydromatic



SUITE
Hydromatic

PELLET STOVES > Hydro Maestro > EGO



White metal_302



Dark metal_308



Silver metal_313



Bordeaux metal_304

EGO Hydromatic 12

Model: EGO HYDRAMATIC 12 M2

POWER				
kW 11,9	91,1/96,1%	Ø cm 8	kg 147	cm A x B x C cm 50 x 55 x 104

kW 10,0

MATERIALS:
 Steel: structure, stainless steel side
 Metal: painted sides
 Cast iron: grate, door, front elements, top

STRUCTURE

Hydromatic 12 M2+

7121012

CLADDING

White metal_302

6921001

Dark metal_308

6921002

Silver metal_313

6921003

Bordeaux metal_304


6921004

ACCESSORIES SUPPLIED AS STANDARD




A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel

Supplied as standard



Temperature probe

Supplied as standard



Maestro smartphone new app

Free download

DEDICATED ACCESSORIES



Pellet level sensor

4018005



Pressure gauge

4018035



NTC probe

Temperature probe
Cable length 1500 mm

4012062



Thermostatic valve kit

The valve is needed to prevent the return of cold water from the system to the boiler and therefore it avoids the danger of condensation. It is calibrated at 45 °C. In the price copper connecting pipes are included.

40A18011















Freestanding remote control

Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).

4022002

PELLET STOVES > Hydro Maestro > STAR

	DESCRIPTION/CODE	
STRUCTURE		
	Hydromatic 12 M2+	7121017
CLADDING		
	White ceramic_102	6921005
	Black ceramic_107	6921007
	Warm grey ceramic_113	6921008
ACCESSORIES SUPPLIED AS STANDARD		
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard
	Temperature probe	Supplied as standard
	Maestro smartphone new app	Free download
DEDICATED ACCESSORIES		
	Pellet level sensor	4018005
	Pressure gauge	4018035
	NTC probe Temperature probe Cable length 1500 mm	4012062
	Thermostatic valve kit The valve is needed to prevent the return of cold water from the system to the boiler and therefore it avoids the danger of condensation. It is calibrated at 45 °C. In the price copper connecting pipes are included.	40A18011
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002















White ceramic_102

Black ceramic_107

Warm grey ceramic_113

STAR Hydromatic 12







Model: STAR HYDRAMATIC 12 M2

				
kW 11,9	91,1/96,1%	Ø cm 8	kg 147	cm A x B x C
	kW 10,0			
				
				

A+    Conto Termico 2.0

MATERIALS:
Cast iron: brazier, combustion chamber, door, front diffuser
Ceramic: sides, top, front panel

PELLET STOVES > Hydro Maestro > MUSA

		DESCRIPTION/CODE	
STRUCTURE			
Hydromatic 18 M2+		7121039	
Hydromatic 24 M2+		7121040	
CLADDING			
White metal_302		6921026	
Dark metal_308		6921027	
Silver metal_313		6921028	
Bordeaux metal_304		6921029	
ACCESSORIES SUPPLIED AS STANDARD			
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
	Temperature probe	Supplied as standard	-
	Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES			
	Pellet level sensor	4018005	
	Pressure gauge	4018035	
	NTC probe Temperature probe Cable length 1500 mm	4012062	
	Thermostatic valve kit The valve is needed to prevent the return of cold water from the system to the boiler and therefore it avoids the danger of condensation. It is calibrated at 45 °C. In the price copper connecting pipes are included.	40A18011	
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	



White metal_302



Dark metal_308








Silver metal_313



Bordeaux metal_304

MUSA Hydromatic 18

Model: MUSA HYDRAMATIC 18 M2

				
kW 17,7	94,8/95,9%	Ø cm 8	kg 197	cm 56 x 59 x 116








kW 12,7

						
---	---	---	---	---	---	---

MUSA Hydromatic 24

Model: MUSA HYDRAMATIC 24 M2

				
kW 24,2	92,9/95,9%	Ø cm 8	kg 197	cm 56 x 59 x 116



kW 18,2

						
---	---	---	---	---	---	---

				Conto Termico 2.0 BAFA/BEG
---	---	---	---	-------------------------------

MATERIALS:
Steel: structure
Metal: painted sides
Cast iron: brazier, door, front elements, top, combustion chamber

CLUB Hydromatic



PELLET STOVES_Hydro Maestro

PELLET STOVES > Hydro Maestro > CLUB



White ceramic_102



Matt Black ceramic_126

CLUB Hydromatic 18

Model: CLUB HYDROMATIC 18 M2

POWER				
kW 17,7	94,8/95,9%	Ø cm 8	kg 190	cm 56 x 55,4 x 115,2



kW 12,7



CLUB Hydromatic 24

Model: CLUB HYDROMATIC 24 M2
Model: CLUB HYDROMATIC 24 ACS M2

POWER				
kW 24,2	92,9/95,9%	Ø cm 8	kg 190	cm 56 x 55,4 x 115,2



kW 18,2



Conto Termico 2.0
BAFA/BEG

MATERIALS:
Cast iron: brazier, combustion chamber, door, front diffuser
Ceramic: sides, top, front panel

STRUCTURE

Hydromatic 18 M2+	7121027
Hydromatic 24 M2+	7121029

CLADDING CLUB

White ceramic_102	6921018
Matt Black ceramic_126	6921020

CLADDING CLUB ABSOLUTE

126_Matt Black + 308_Dark (1)	See photo on page 35	6922021
102_White + 308_Dark (2)	See photo on page 35	6922022
126_Matt Black + 302_White (3)	See photo on page 35	6922023

ACCESSORIES SUPPLIED AS STANDARD

A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
---	----------------------	---

Temperature probe	Supplied as standard	-
--------------------------	----------------------	---

Maestro smartphone new app	Free download	-
-----------------------------------	---------------	---

DEDICATED ACCESSORIES

Pellet level sensor	4018005	
----------------------------	---------	--

Pressure gauge	4018035	
-----------------------	---------	--

NTC probe Temperature probe Cable length 1500 mm	4012062	
---	---------	--

Thermostatic valve kit The valve is needed to prevent the return of cold water from the system to the boiler and therefore it avoids the danger of condensation. It is calibrated at 45 °C. In the price copper connecting pipes are included.	40A18011	
--	----------	--

Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	
---	---------	--

PELLET STOVES > Hydro Maestro > SUITE



Warm Grey ceramic_113



Bordeaux ceramic_105

SUITE Hydromatic 18

Model: SUITE HYDRAMATIC 18 M2

POWER				
kW 17,7	94,8/95,9%	Ø cm 8	kg 190	cm 56 x 55,4 x 115,1



kW 12,7

--	--	--	--	--	--	--	--

SUITE Hydromatic 24

Model: SUITE HYDRAMATIC 24 M2
Model: SUITE HYDRAMATIC 24 ACS M2

POWER				
kW 24,2	92,9/95,9%	Ø cm 8	kg 190	cm 56 x 55,4 x 115,1



kW 18,2

--	--	--	--	--	--	--	--

A++				Conto Termico 2.0 BAFA/BEG
------------	--	--	--	-------------------------------

MATERIALS:
Cast iron: brazier, combustion chamber, door, front diffuser
Ceramic: sides, top, front panel

	DESCRIPTION/CODE	
STRUCTURE		
Hydromatic 18 M2+	7121027	
Hydromatic 24 M2+	7121029	
CLADDING		
Warm Grey ceramic_113	6921017	
Bordeaux ceramic_105	6921015	
ACCESSORIES SUPPLIED AS STANDARD		
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard
	Temperature probe	Supplied as standard
	Maestro smartphone new app	Free download
DEDICATED ACCESSORIES		
	Pellet level sensor	4018005
	Pressure gauge	4018035
	NTC probe Temperature probe Cable length 1500 mm	4012062
	Thermostatic valve kit The valve is needed to prevent the return of cold water from the system to the boiler and therefore it avoids the danger of condensation. It is calibrated at 45 °C. In the price copper connecting pipes are included.	40A18011
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002



PELLET STOVES > Hydro Maestro > JAZZ



Black ceramic_107

Bordeaux ceramic_105



White ceramic_102

JAZZ Hydromatic 30 **NEW**

Model: JAZZ HYDRAMATIC 30 M1

POWER				
kW 28,5	93,4/94,4%	Ø cm 10	kg 292	cm 61 x 68,8 x 133,7

















kW 27,1

Conto Termico 2.0

MATERIALS:
 Steel: structure
 Glass: door
 Cast iron: top, brazier
 Ceramic: front cladding
 Metal: painted sides





		DESCRIPTION/CODE	
STRUCTURE			
Hydromatic 30 M1+		7122078	
CLADDINGS			
	Black ceramic_107	6918018	
	Bordeaux ceramic_105	6918019	
	White ceramic_102	6918020	
ACCESSORIES SUPPLIED AS STANDARD			
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
	Temperature probe	Supplied as standard	-
	Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES			
	Pellet level sensor	4018005	
	Pressure gauge	4018035	
	NTC probe Temperature probe Cable length 1500 mm	4012062	
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	
	Pipes and accessories for connection Ø 10 cm	Straight pellet pipe L 25 cm 40A11005 Straight pellet pipe L 50 cm 40A11006 Straight pellet pipe L 100 cm 40A11007 90° bend 40A11003 "T" joint 40A11004 45° bend 40A12018 90° bend that is easy to inspect 40A12019 Pipe clamp 40A12020 Rose 40A12021 Silicone gasket - Pack of 5 pieces 40A12022 Joint F/F - Ø 10/10 cm 4013009 Joint F/F - Ø 8/8 cm 4013010	

PELLET STOVES > Hydro Maestro > AKI

		DESCRIPTION/CODE	
 White metal_302			
 Dark metal_308			
 Silver metal_313			
 White ceramic_102			
 Bordeaux ceramic_105			
 Sand ceramic_109			
		STRUCTURE	
		Hydromatic 18 M2+	7121045
		Hydromatic 24 M2+	7121046
		METAL CLADDINGS	
		White metal_302	6920026
		Dark metal_308	6920025
		Silver metal_313	6920027
		CERAMIC CLADDINGS	
		White ceramic_102	6920028
		Bordeaux ceramic_105	6920029
		Sand ceramic_109	6920030
		PIPES REQUIRED FOR INSTALLATION	
 Linear pipe Painted pipe 100 cm with silicone gasket for vertical smoke outlet installation.		L= 100 cm - ø cm 8	4022007
 90° Curve Painted curve with silicone gasket for rear smoke outlet installation.		Ø cm 8	4022008
		ACCESSORIES SUPPLIED AS STANDARD	
 A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel			Supplied as standard
 Temperature probe			Supplied as standard
 Maestro smartphone new app			Free download
		DEDICATED ACCESSORIES	
 Pellet level sensor			4018005
 Pressure gauge			4018035
 NTC probe Temperature probe Cable length 1500 mm			4012062
 Thermostatic valve kit The valve is needed to prevent the return of cold water from the system to the boiler and therefore it avoids the danger of condensation. It is calibrated at 45 °C. In the price copper connecting pipes are included.			40A18011
 Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).			4022002

AKI Hydromatic 18

Model: AKI HYDRAMATIC 18 M2





POWER				
kW 17,7	94,8/95,9%	Ø cm 8	kg 190	cm 87,2 x 40,7 x 110


kW 12,7



AKI Hydromatic 24

Model: AKI HYDRAMATIC 24 M2

POWER				
kW 24,2	92,9/95,9%	Ø cm 8	kg 190	cm 87,2 x 40,7 x 110


kW 18,2



A++ ECODESIGN 2022    Conto Termico 2.0 BAFA/BEG

MATERIALS:
Steel: structure
Metal: cladding. door, sides
Ceramic: sides
Cast iron: brazier
Aluminium: Front diffuser



PAD



PELLET STOVES > Hydro Maestro > PAD

		DESCRIPTION/CODE	
STRUCTURE			
Line/Plain Hydromatic 18 M2+		7121030	
Line/Plain Hydromatic 24 M2+		7121031	
CLADDING			
	Plain White ceramic_102	6921025	
	Plain Black ceramic_107	6921024	
	Line White ceramic_102	6921023	
	Line Bordeaux ceramic_105	6921022	
ACCESSORIES SUPPLIED AS STANDARD			
	A new control panel "Lift" that integrates the ordinary functionalities with those of the emergency panel	Supplied as standard	-
	Temperature probe	Supplied as standard	-
	Maestro smartphone new app	Free download	-
DEDICATED ACCESSORIES			
	Pellet level sensor	4018005	
	Pressure gauge	4018035	
	NTC probe Temperature probe Cable length 1500 mm	4012062	
	Thermostatic valve kit The valve is needed to prevent the return of cold water from the system to the boiler and therefore it avoids the danger of condensation. It is calibrated at 45 °C. In the price copper connecting pipes are included.	40A18011	
	Freestanding remote control Remote control with ambient thermostat and humidity sensor for room temperature control, always visible thanks to the e-ink display (optional).	4022002	



Plain White ceramic_102



Plain Black ceramic_107







Line White ceramic_102











Line Bordeaux ceramic_105

PAD Hydromatic 18

Model: PAD PLAIN HYDROMATIC 18 M2
PAD LINE HYDROMATIC 18 M2





POWER				
kW 17,7	94,8/95,9%	Ø cm 8	kg 190	cm 59,3 x 61 x 120



kW 12,7
















PAD Hydromatic 24

Model: PAD PLAIN HYDROMATIC 24 M2
PAD LINE HYDROMATIC 24 M2

POWER				
kW 24,2	92,9/95,9%	Ø cm 8	kg 190	cm 59,3 x 61 x 120


kW 18,2




 Conto Termico 2.0
BAFA/BEG

MATERIALS:
Steel: structure
Glass: door
Ceramic: sides
Cast iron: top, front diffuser, base

PELLET STOVES_Hydro Easy

94 CLIO > Hydro

92 THEA > Hydro



PELLET STOVES > Hydro Easy > CLIO



White metal_302

Dark metal_308



Silver metal_313

Bordeaux metal_304

CLIO Hydro 16 **NEW**

Model: CLIO HYDRO 16 S2

POWER				
kW 16,1 H ₂ O kW 12,9	93,7/96,7%	Ø cm 8	kg 195	cm A x B x C 50,2 x 50,5 x 112



CLIO Hydro 23 **NEW**

Model: CLIO HYDRO 23 S2

POWER				
kW 22,4 H ₂ O kW 18	92/96,7%	Ø cm 8	kg 195	cm A x B x C 50,2 x 50,5 x 112



easy connect



Conto Termico 2.0

A++

Model: CLIO HYDRO 16 S2









A+

Model: CLIO HYDRO 23 S2

MATERIALS:
Steel: structure
Metal: painted sides
Cast iron: grate, door, front elements, top, combustion chamber

		DESCRIPTION/CODE
STRUCTURE		
	Hydro 16 S2	7122030
	Hydro 23 S2	7122031
CLADDINGS		
	White metal_302	6916043
	Dark metal_308	6916042
	Silver metal_313	6917014
	Bordeaux metal_304	6916044
ACCESSORIES SUPPLIED AS STANDARD		
	Temperature probe	Supplied as standard
DEDICATED ACCESSORIES		
	Kit Wi-Fi Easy Connect For remote connection via the app. To be installed on the back of the stove, self-powered. Compatible with a 2.4 GHz frequency Wi-Fi router.	4020003
	Pressure gauge	4018035
	NTC probe Temperature probe Cable length 1500 mm	4012062
	Auxiliary boiler connection module Manages any auxiliary gas or diesel boilers to guarantee user comfort (for example, in case of pellet depletion)	4012078

PELLET STOVES > Hydro Easy > THEA

		DESCRIPTION/CODE
STRUCTURE		
THEA Hydro 16 S2		7122032
THEA Hydro 23 S2		7122033
CLADDINGS		
	White metal_302	6920010
	Dark metal_308	6920009
	Silver metal_313	6920012
	Bordeaux metal_304	6920011
ACCESSORIES SUPPLIED AS STANDARD		
	Temperature probe	Supplied as standard
PIPES REQUIRED FOR INSTALLATION		
	Linear pipe Painted pipe 100 cm with silicone gasket for vertical smoke outlet installation.	L= 100 cm - ø cm 8 4022007
	90° Curve Painted curve with silicone gasket for rear smoke outlet installation.	Ø cm 8 4022008
DEDICATED ACCESSORIES		
	Kit Wi-Fi Easy Connect For remote connection via the app. To be installed on the back of the stove, self-powered. Compatible with a 2.4 GHz frequency Wi-Fi router.	4020003
	Pressure gauge	4018035
	NTC probe Temperature probe Cable length 1500 mm	4012062
	Auxiliary boiler connection module Manages any auxiliary gas or diesel boilers to guarantee user comfort (for example, in case of pellet depletion)	4012078



White metal_302

Dark metal_308














Silver metal_313

Bordeaux metal_304

THEA Hydro 16 NEW






Model: THEA HYDRO 16 S2







				
POWER	%	Ø cm 8	Kg	cm A x B x C
kW 16,1 H ₂ O kW 12,9	93,7/96,7%	Ø cm 8	kg 195	cm 89,4 x 41,4 x 110

THEA Hydro 23 NEW

Model: THEA HYDRO 23 S2

				
POWER	%	Ø cm 8	Kg	cm A x B x C
kW 22,4 H ₂ O kW 18	92/96,7%	Ø cm 8	kg 195	cm 89,4 x 41,4 x 110

easy connect



Conto Termico 2.0

A++ Model: THEA HYDRO 16 S2

A+ Model: THEA HYDRO 23 S2

MATERIALS:
Steel: structure
Metal: cladding, door, sides

THEA



PELLET STOVES_Hydro Easy

PELLET_Fireplaces and inserts

104 BOXTHERM 60 BASIC > AIR

105 BOXTHERM 70 BASIC > AIR

98 VIVO 90-9 SLIM > COMFORT AIR

99 VIVO 90-9 BASIC > COMFORT AIR

100 VIVO 90-11 SLIM > COMFORT AIR

101 VIVO 90-11 BASIC > COMFORT AIR

107 VIVO 90 > HYDRO

PELLET > GLASS-FRONTED FIREPLACES > VIVO



VIVO 90 Comfort Air 9

Model: VIVO 90 COMFORT AIR 9 M1

POWER				
kW 8,9	92,4/95,7%	Ø cm 8	kg 120	cm A x B x C
				cm 91,7 x 60,8 x 57,7

A+ Conto Termico 2.0

MATERIALS:
Steel: structure
Cast iron: brazier, combustion chamber

VERSIONS

Comfort Air 9 M1	5019001
SLIM Comfort Air® kit -2 x Multi 12 outlets -2 x ø 10 cm - L=1.5 m pipes -2 x ø 6 cm pipes -Motor inspection hatches -2 fan units -2 x ø 60 mm clamps -2 x ø 100 mm clamps	4012008
TOTAL	

INTERFACES

Freestanding remote control with room thermostat Cm 5,4x6,5x19,5 H	4020006
Maestro built-in panel Cm 16,3x8,5	4021001
Maestro wall-mounted panel Cm 16,3x8,5	4021002

Maestro smartphone app	Free download	-
-------------------------------	---------------	---


STANDARD EQUIPMENT

Temperature probe featured as standard on the machine		-
Passe-partout frame 4 sides. "Blade" convection grille x1	99x6,1 cm	
Pellet feed pipe with door		

DEDICATED ACCESSORIES

Pellet level sensor		4018005
Support Optional.		4014001
FLIP ventilation outlet	White glass	4012017
FLOAT ventilation outlet	White glass and white frame	4012018
	White glass and black frame	4012019
GHOST ventilation outlet	White glass	4012020
	Black glass	4012021
MINIMAL ventilation outlet	Metal can be painted	4017009
SOFT ventilation outlet	Ceramic	4017010
Comfort Air® accessories To build a Comfort Air® ducting system > p. 129		


PELLET > GLASS-FRONTED FIREPLACES > VIVO

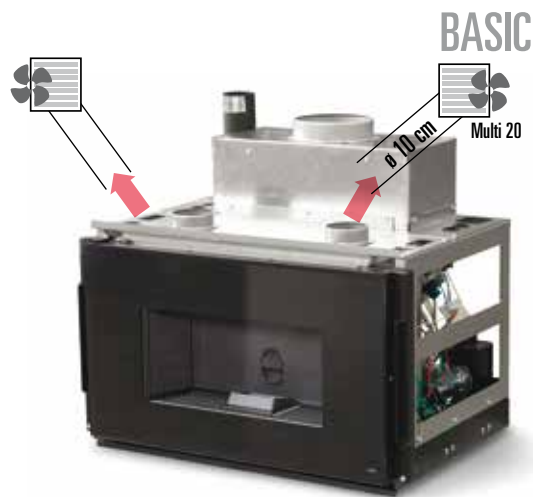

VIVO 90 Comfort Air 9

Model: VIVO 90 COMFORT AIR 9 M1

POWER				
kW 8,9	92,4/95,7%	Ø cm 8	kg 120	cm A x B x C
				cm 91,7 x 60,8 x 57,7



MATERIALS:
Steel: structure
Cast iron: brazier, combustion chamber

VERSIONS

Comfort Air 9 M1	5019001
BASIC Comfort Air® kit -2 x Multi 20 outlets -2 x ø 10 cm - L=1.5 m pipes -2 fan units -4 clamps -2 brackets	4012007
TOTAL	

INTERFACES

Freestanding remote control with room thermostat Cm 5,4x6,5x19,5 H	4020006
Maestro built-in panel Cm 16,3x8,5	4021001
Maestro wall-mounted panel Cm 16,3x8,5	4021002
Maestro smartphone app	Free download

STANDARD EQUIPMENT

Temperature probe featured as standard on the machine	
Passe-partout frame 4 sides. "Blade" convection grille x1 Pellet feed pipe with door	99x6,1 cm

DEDICATED ACCESSORIES

Pellet level sensor	4018005
Support Optional.	4014001
MONO 20 MONO-DIRECTIONAL AIR OUTLET WITH HUMIDIFIER	Without light 4008021 With light* 4008023
BI 20 BI-DIRECTIONAL AIR OUTLET	4008024

PELLET > GLASS-FRONTED FIREPLACES > VIVO



VIVO 90 Comfort Air 11

Model: VIVO 90 COMFOR AIR 11 M1

POWER				
kW 10,9	90,7/95,7%	Ø cm 8	kg 140	cm A x B x C



MATERIALS:
Steel: structure
Cast iron: brazier, combustion chamber

VERSIONS

Comfort Air 11 M1	5019002
SLIM Comfort Air® kit -2 x Multi 12 outlets -2 x Ø 10 cm - L=1.5 m pipes -2 x Ø 6 cm pipes -Motor inspection hatches -2 fan units -2 x Ø 60 mm clamps -2 x Ø 100 mm clamps	4012008
	TOTAL

INTERFACES

Freestanding remote control with room thermostat Cm 5,4x6,5x19,5 H	4020006
Maestro built-in panel Cm 16,3x8,5	4021001
Maestro wall-mounted panel Cm 16,3x8,5	4021002
Maestro smartphone app	Free download

STANDARD EQUIPMENT


Temperature probe featured as standard on the machine	
Passe-partout frame 4 sides. "Blade" convection grille x1	99x6,1 cm
Pellet feed pipe with door	
Upper hot air outlet nozzle	90x11 cm

DEDICATED ACCESSORIES

Pellet level sensor	4018005
Support Optional.	4014001
Ventilation outlet	See VIVO 90 Comfort Air 9 SLIM

Comfort Air® accessories
To build a Comfort Air® channelling system
> p. 129

PELLET > GLASS-FRONTED FIREPLACES > VIVO

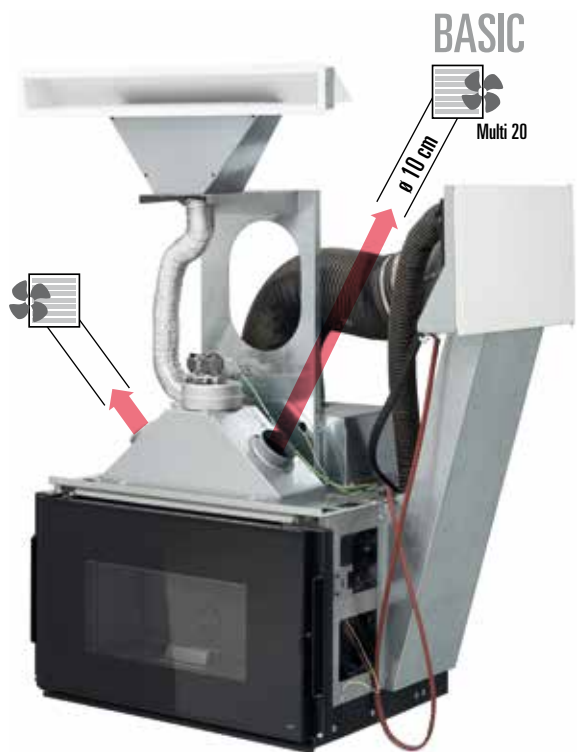

VIVO 90 Comfort Air 11

Model: VIVO 90 COMFOR AIR 11 M1

POWER				
kW 10,9	90,7/95,7%	Ø cm 8	kg 140	cm A x B x C

A+ Conto Termico 2.0

MATERIALS:
Steel: structure
Cast iron: brazier, combustion chamber

VERSIONS

Comfort Air 11 M1	5019002
BASIC Comfort Air® kit -2 x Multi 20 outlets -2 x ø 10 cm - L=1.5 m pipes -2 fan units -4 clamps -2 brackets	4012007
TOTAL	

INTERFACES

Freestanding remote control with room thermostat Cm 5,4x6,5x19,5 H	4020006
Maestro built-in panel Cm 16,3x8,5	4021001
Maestro wall-mounted panel Cm 16,3x8,5	4021002
Maestro smartphone app	Free download

STANDARD EQUIPMENT

Temperature probe featured as standard on the machine	-
Passe-partout frame 4 sides. "Blade" convection grille x1	99x6,1 cm
Pellet feed pipe with door	
Upper hot air outlet nozzle	90x11 cm

DEDICATED ACCESSORIES

Pellet level sensor	4018005
Support Optional.	4014001
MONO 20 MONO-DIRECTIONAL AIR OUTLET WITH HUMIDIFIER	Without light 4008021 With light* 4008023
BI 20 BI-DIRECTIONAL AIR OUTLET	4008024





PELLET > INSERTS > BOXTHERM



BOXTHERM MAESTRO 60 Basic

Model: BOXTHERM 60 AIR 6 BASIC M1



kW 5,9 91/94,7% Ø cm 8 kg 80



cm 64 x 45 x 57,3

Internal dimensions
cm 57,5 x 45 x 53



Conto Termico 2.0

MATERIALS:
Steel: structure
Cast iron: brazier, combustion chamber

VERSION		DESCRIPTION/CODE
60 Air 6 M1 (BASIC)		5019003
DEDICATED ACCESSORIES		
	Pellet level sensor	4018005
	Frame 4 sides black	BASIC 60 4019012
	Combustion air kit To withdraw combustion air from the outdoor environment.	4018008
	Support Optional.	4012009
	Feet kit Allows the inlet of cooling air from the front.	4018031
INTERFACES		
	Freestanding remote control with room thermostat Cm 5,4x6,5x19,5 H	4020006
	Maestro built-in panel Cm 16,3x8,5	4021001
	Maestro wall-mounted panel Cm 16,3x8,5	4021002
	Maestro smartphone app	Free download
STANDARD EQUIPMENT		
	Temperature probe featured as standard on the machine	-




BOXTHERM MAESTRO 70 Basic


Model: BOXTHERM 70 AIR 9 BASIC M1



kW 8,8 90,6/94,1% Ø cm 8 kg 135



cm 75,4 x 55 x 57,3 Internal dimensions cm 68,9 x 55 x 53



MATERIALS:
Steel: structure
Cast iron: brazier, combustion chamber

VERSION		DESCRIPTION/CODE
70 Air 9 M1 (BASIC)		5019004
DEDICATED ACCESSORIES		
	Pellet level sensor	4018005
	Frame 4 sides black	BASIC 70 4019013
	Combustion air kit To withdraw combustion air from the outdoor environment.	4018007
	Support Optional.	4012009
	Feet kit Allows the inlet of cooling air from the front.	4018031
INTERFACES		
	Freestanding remote control with room thermostat Cm 5,4x6,5x19,5 H	4020006
	Maestro built-in panel Cm 16,3x8,5	4021001
	Maestro wall-mounted panel Cm 16,3x8,5	4021002
	Maestro smartphone app	Free download
STANDARD EQUIPMENT		
	Temperature probe featured as standard on the machine	

VIVO 90 HYDRO



PELLET > HYDRO GLASS-FRONTED FIREPLACES > VIVO



VIVO 90 Hydro 16

Model: VIVO 90 HYDRO 16 M1

POWER				
kW 18	94,2/95,9%	Ø cm 10	kg 190	cm A x B x C 95 x 75 x 124



kW 13



VIVO 90 Hydro 24

Model: VIVO 90 HYDRO 24 M1

POWER				
kW 24,7	93,3/95,9%	Ø cm 10	kg 190	cm A x B x C 95 x 75 x 124



kW 19



Conto Termico 2.0
BAFA/BEG

MATERIALS:
Steel: structure
Cast iron: brazier
Metal: combustion chamber

	DESCRIPTION/CODE	
STRUCTURE		
Vivo 90 Hydro 16 M1	5020003	
Vivo 90 Hydro 24 M1	5020004	
INTERFACES		
Freestanding remote control with room thermostat Cm 5,4x6,5x19,5 H	4020006	
Maestro built-in panel Cm 16,3x8,5	4021001	
Maestro wall-mounted panel Cm 16,3x8,5	4021002	
Maestro smartphone app	Free download	-
STANDARD EQUIPMENT		
Temperature probe featured as standard on the machine		-
Pellet feed pipe with door		-
DEDICATED ACCESSORIES		
Pellet level sensor	4018005	
Pressure gauge	4018035	
NTC probe Temperature probe Cable length 1500 mm	4012062	
Support Optional.	4014001	

WOOD_Fireplaces and inserts

- 110 PLASMA 115 Wood > Natural/Comfort Air
- 110 PLASMA 95 Wood > Natural/Comfort Air
- 111 PLASMA 85 Wood > Natural/Comfort Air
- 111 PLASMA 75 Wood > Natural/Comfort Air
- 114 PLASMA 75 DX/SX Wood > Natural/Comfort Air
- 114 PLASMA 95 DX/SX Wood > Natural/Comfort Air
- 115 PLASMA 115B Wood > Natural/Comfort Air
- 115 PLASMA B95 Wood > Natural/Comfort Air
- 118 PLASMA T50 Wood > Natural/Comfort Air
- 118 PLASMA 95T Wood > Natural/Comfort Air
- 121 VIVO 90 Q Wood > Natural/Comfort Air
- 121 VIVO 70 Q Wood > Natural/Comfort Air

WOOD > GLASS-FRONTED FIREPLACES > PLASMA



PLASMA 115 Wood

POWER				
kW 14,1	80,1%	Ø cm 20	kg 384	cm A x B x C



New high-performing and efficient combustion in accordance with the strictest regulations governing emissions. Automatic primary, post-combustion and glass cleaning air calibration system "Easy Going"

New more ergonomic and precise opening system with option of opening for cleaning at 90° (without handle) or 45° with a handle. The "Easy Switch" system offers the option of using either the handle or a hand, prioritising ergonomics or very clean aesthetics, respectively.

VERSION		DESCRIPTION/CODE	
	Black metal_303	Plasma 115	5017001
DEDICATED ACCESSORIES			
	Passe-partout Painted black steel_303. It can be used as a minimal frame in the case of plasterboard cladding.		620217
	Spacer Painted black steel_303 should be used to fill the gap between the glass-fronted fireplace and non-MCZ artisan fireplace.		4008073
	Additional weights kit Additional weights to allow the natural descent and closing of the door pursuant to Bauart A1 standard.		4017004
	45° curve in stainless steel	Ø mm 150	4017005
	Flexible pipe to channel air	Ø mm 150 - 1,5 m	4017007
	Supplementary handle for Plasma	Optional	4019016
	Chimney handling kit 1 rubber 4 revolving wheels 4 threaded pipes for transport		4017008
	Comfort Air Kit Available in Slim and Basic. The hood kit should be completed by choosing 2 hot air outlets. > p. 134	Slim Basic VF Basic VN	4011012 4008038N 4008036



PLASMA 95 Wood

POWER				
kW 13,3	80,1%	Ø cm 20	kg 344	cm A x B x C



New high-performing and efficient combustion in accordance with the strictest regulations governing emissions. Automatic primary, post-combustion and glass cleaning air calibration system "Easy Going"

New more ergonomic and precise opening system with option of opening for cleaning at 90° (without handle) or 45° with a handle. The "Easy Switch" system offers the option of using either the handle or a hand, prioritising ergonomics or very clean aesthetics, respectively.

VERSION		DESCRIPTION/CODE	
	Black metal_303	Plasma 95	5017005
DEDICATED ACCESSORIES			
	Passe-partout Painted black steel_303. It can be used as a minimal frame in the case of plasterboard cladding.		620216
	Spacer Painted black steel_303 should be used to fill the gap between the glass-fronted fireplace and non-MCZ artisan fireplace.		4008072
	Additional weights kit Additional weights to allow the natural descent and closing of the door pursuant to Bauart A1 standard.		4017004
	45° curve in stainless steel	Ø mm 150	4017005
	Flexible pipe to channel air	Ø mm 150 - 1,5 m	4017007
	Supplementary handle for Plasma	Optional	4019016
	Chimney handling kit 1 rubber 4 revolving wheels 4 threaded pipes for transport		4017008
	Comfort Air Kit Available in Slim and Basic. The hood kit should be completed by choosing 2 hot air outlets. > p. 134	Slim Basic VF Basic VN	4011012 4008038N 4008036

WOOD > GLASS-FRONTED FIREPLACES > PLASMA



PLASMA 85 Wood

POWER					cm A x B x C
kW 13,3	80,1%	Ø cm 20	kg 328	cm 95,6 x 54 x 156,6	



New high-performing and efficient combustion in accordance with the strictest regulations governing emissions. Automatic primary, post-combustion and glass cleaning air calibration system "Easy Going". New more ergonomic and precise opening system with option of opening for cleaning at 90° (without handle) or 45° with a handle. The "Easy Switch" system offers the option of using either the handle or a hand, prioritising ergonomics or very clean aesthetics, respectively.

VERSION		DESCRIPTION/CODE	
	Black metal_303	Plasma 85	5017010
DEDICATED ACCESSORIES			
	Passe-partout Painted black steel_303. It can be used as a minimal frame in the case of plasterboard cladding.		4017013
	Spacer Painted black steel_303 should be used to fill the gap between the glass-fronted fireplace and non-MCZ artisan fireplace.		4017012
	Additional weights kit Additional weights to allow the natural descent and closing of the door pursuant to Bauart A1 standard.		4017004
	45° curve in stainless steel	Ø mm 150	4017005
	Flexible pipe to channel air	Ø mm 150 - 1,5 m	4017007
	Supplementary handle for Plasma	Optional	4019016
	Chimney handling kit 1 rubber 4 revolving wheels 4 threaded pipes for transport		4017008
	Comfort Air Kit Available in Slim and Basic. The hood kit should be completed by choosing 2 hot air outlets. > p. 134	Slim Basic VF Basic VN	4011012 4008038N 4008036



PLASMA 75 Wood

POWER					cm A x B x C
kW 12,5	80,3%	Ø cm 20	kg 312	cm 84,6 x 54 x 156,6	



New high-performing and efficient combustion in accordance with the strictest regulations governing emissions. Automatic primary, post-combustion and glass cleaning air calibration system "Easy Going". New more ergonomic and precise opening system with option of opening for cleaning at 90° (without handle) or 45° with a handle. The "Easy Switch" system offers the option of using either the handle or a hand, prioritising ergonomics or very clean aesthetics, respectively.

VERSION		DESCRIPTION/CODE	
	Black metal_303	Plasma 75	5017012
DEDICATED ACCESSORIES			
	Passe-partout Painted black steel_303. It can be used as a minimal frame in the case of plasterboard cladding.		6217004
	Spacer Painted black steel_303 should be used to fill the gap between the glass-fronted fireplace and non-MCZ artisan fireplace.		4017021
	Additional weights kit Additional weights to allow the natural descent and closing of the door pursuant to Bauart A1 standard.		4017004
	45° curve in stainless steel	Ø mm 150	4017005
	Flexible pipe to channel air	Ø mm 150 - 1,5 m	4017007
	Supplementary handle for Plasma	Optional	4019016
	Chimney handling kit 1 rubber 4 revolving wheels 4 threaded pipes for transport		4017008
	Comfort Air Kit Available in Slim and Basic. The hood kit should be completed by choosing 2 hot air outlets. > p. 134	Slim Basic VF Basic VN	4011012 4008038N 4008036

PLASMA 95 Wood





WOOD > GLASS-FRONTED FIREPLACES > PLASMA



PLASMA 95 DX/SX Wood

POWER				
kW 14,8	80,8%	Ø cm 20	kg 370	cm A x B x C

Model: PLASMA 95 DX WOOD
PLASMA 95 SX WOOD

comfort air, natural, easy switch, easy going, ECODESIGN 2022, A+

New high-performing and efficient combustion in accordance with the strictest regulations governing emissions. Automatic primary, post-combustion and glass cleaning air calibration system "Easy Going". New more ergonomic and precise opening system. The "Easy Switch" system offers the option of using either the handle or a hand, prioritising ergonomics or very clean aesthetics, respectively.

VERSION		DESCRIPTION/CODE	
	Black metal_303	PLASMA 95 DX Wood	5018006
	Black metal_303	PLASMA 95 SX Wood	5018011
DEDICATED ACCESSORIES			
	Passe-partout Painted black steel_303. It can be used as a minimal frame in the case of plasterboard cladding.	RH LH	4018019 4018020
	Spacer Painted black steel_303 should be used to fill the gap between the glass-fronted fireplace and non-MCZ artisan fireplace.	RH LH	4018021 4018022
	Additional weights kit Additional weights to allow the natural descent and closing of the door pursuant to Bauart A1 standard.		4018023
	45° curve in stainless steel	Ø mm 150	4017005
	Flexible pipe to channel air	Ø mm 150 - 1,5 m	4017007
	Supplementary handle for Plasma	Optional	4019016
	Chimney handling kit 1 rubber 4 revolving wheels 4 threaded pipes for transport		4017008
	Comfort Air Kit > p. 134	Slim Basic VF Basic VN	4011012 4008038N 4008036



PLASMA 75 DX/SX Wood

POWER				
kW 15,5	80,1%	Ø cm 20	kg 330	cm A x B x C

Model: PLASMA 75 DX WOOD
PLASMA 75 SX WOOD

comfort air, natural, easy switch, easy going, ECODESIGN 2022, A

New high-performing and efficient combustion in accordance with the strictest regulations governing emissions. Automatic primary, post-combustion and glass cleaning air calibration system "Easy Going". New more ergonomic and precise opening system. The "Easy Switch" system offers the option of using either the handle or a hand, prioritising ergonomics or very clean aesthetics, respectively.

VERSION		DESCRIPTION/CODE	
	Black metal_303	PLASMA 75 DX Wood	5018005
	Black metal_303	PLASMA 75 SX Wood	5018010
DEDICATED ACCESSORIES			
	Passe-partout Painted black steel_303. It can be used as a minimal frame in the case of plasterboard cladding.	RH LH	4018014 4018015
	Spacer Painted black steel_303 should be used to fill the gap between the glass-fronted fireplace and non-MCZ artisan fireplace.	RH LH	4018016 4018017
	Additional weights kit Additional weights to allow the natural descent and closing of the door pursuant to Bauart A1 standard.		4018018
	45° curve in stainless steel	Ø mm 150	4017005
	Flexible pipe to channel air	Ø mm 150 - 1,5 m	4017007
	Supplementary handle for Plasma	Optional	4019016
	Chimney handling kit 1 rubber 4 revolving wheels 4 threaded pipes for transport		4017008
	Comfort Air Kit > p. 134	Slim Basic VF Basic VN	4011012 4008038N 4008036

WOOD > GLASS-FRONTED FIREPLACES > PLASMA



PLASMA 115B Wood

POWER					cm A x B x C
kW 12,6	77,6%	Ø cm 20	kg 334	cm 128 x 59,4 x 140,6	



New high-performing and efficient combustion in accordance with the strictest regulations governing emissions. Automatic primary, post-combustion and glass cleaning air calibration system "Easy Going". New more ergonomic and precise opening system with option of opening for cleaning at 90° (without handle) or 45° with a handle. The "Easy Switch" system offers the option of using either the handle or a hand, prioritising ergonomics or very clean aesthetics, respectively.

VERSION		DESCRIPTION/CODE	
	Black metal_303	Plasma 115B	5017003
DEDICATED ACCESSORIES			
	Passe-partout Painted black steel_303. It can be used as a minimal frame in the case of plasterboard cladding.		620217
	Spacer Painted black steel_303 should be used to fill the gap between the glass-fronted fireplace and non-MCZ artisan fireplace.		4008073
	Additional weights kit Additional weights to allow the natural descent and closing of the door pursuant to Bauart A1 standard.		4017004
	45° curve in stainless steel	Ø mm 150	4017005
	Flexible pipe to channel air	Ø mm 150 - 1,5 m	4017007
	Supplementary handle for Plasma	Optional	4019016
	Chimney handling kit 1 rubber 4 revolving wheels 4 threaded pipes for transport		4017008
	Comfort Air Kit Available in Slim and Basic. The hood kit should be completed by choosing 2 hot air outlets. > p. 134	Slim Basic VF Basic VN	4011012 4008038N 4008036



PLASMA B95 Wood

POWER					cm A x B x C
kW 18,6	77,2%	Ø cm 20	kg 298	cm 105,6 x 59,4 x 140,6	



New high-performing and efficient combustion in accordance with the strictest regulations governing emissions. Automatic primary, post-combustion and glass cleaning air calibration system "Easy Going". New more ergonomic and precise opening system with option of opening for cleaning at 90° (without handle) or 45° with a handle. The "Easy Switch" system offers the option of using either the handle or a hand, prioritising ergonomics or very clean aesthetics, respectively.

VERSION		DESCRIPTION/CODE	
	Black metal_303	Plasma B95	5020005
DEDICATED ACCESSORIES			
	Passe-partout Painted black steel_303. It can be used as a minimal frame in the case of plasterboard cladding.		620216
	Spacer Painted black steel_303 should be used to fill the gap between the glass-fronted fireplace and non-MCZ artisan fireplace.		4008072
	Additional weights kit Additional weights to allow the natural descent and closing of the door pursuant to Bauart A1 standard.		4017004
	45° curve in stainless steel	Ø mm 150	4017005
	Flexible pipe to channel air	Ø mm 150 - 1,5 m	4017007
	Supplementary handle for Plasma	Optional	4019016
	Chimney handling kit 1 rubber 4 revolving wheels 4 threaded pipes for transport		4017008
	Comfort Air Kit Available in Slim and Basic. The hood kit should be completed by choosing 2 hot air outlets. > p. 134	Slim Basic VF Basic VN	4011012 4008038N 4008036

PLASMA 95 DX Wood





WOOD > GLASS-FRONTED FIREPLACES > PLASMA



PLASMA 95T Wood

POWER				
kW 13,2	80,2%	Ø cm 20	kg 373	cm A x B x C



New high-performing and efficient combustion in accordance with the strictest regulations governing emissions. Automatic primary, post-combustion and glass cleaning air calibration system "Easy Going". New more ergonomic and precise opening system. The "Easy Switch" system offers the option of using either the handle or a hand, prioritising ergonomics or very clean aesthetics, respectively.

VERSION		DESCRIPTION/CODE	
	Black metal_303	PLASMA 95T Wood	5018008
DEDICATED ACCESSORIES			
	Passe-partout Painted black steel_303. It can be used as a minimal frame in the case of plasterboard cladding.		4018012
	Spacer Painted black steel_303 should be used to fill the gap between the glass-fronted fireplace and non-MCZ artisan fireplace.		4018013
	Additional weights kit Additional weights to allow the natural descent and closing of the door pursuant to Bauart A1 standard.		4018024
	45° curve in stainless steel	Ø mm 150	4017005
	Flexible pipe to channel air	Ø mm 150 - 1,5 m	4017007
	Supplementary handle for Plasma	Optional	4019016
	Chimney handling kit 1 rubber 4 revolving wheels 4 threaded pipes for transport		4017008
	Comfort Air Kit Available in Slim and Basic. The hood kit should be completed by choosing 2 hot air outlets. > p. 134	Slim Basic VF Basic VN	4011012 4008038N 4008036



PLASMA T50 Wood

POWER				
kW 18,2	77,6%	Ø cm 20	kg 360	cm A x B x C



New high-performing and efficient combustion in accordance with the strictest regulations governing emissions. Automatic primary, post-combustion and glass cleaning air calibration system "Easy Going". New more ergonomic and precise opening system. The "Easy Switch" system offers the option of using either the handle or a hand, prioritising ergonomics or very clean aesthetics, respectively.

VERSION		DESCRIPTION/CODE	
	Black metal_303	PLASMA T50 Wood	5019014
DEDICATED ACCESSORIES			
	Passe-partout Painted black steel_303. It can be used as a minimal frame in the case of plasterboard cladding.		4018010
	Spacer Painted black steel_303 should be used to fill the gap between the glass-fronted fireplace and non-MCZ artisan fireplace.		4018011
	Additional weights kit Additional weights to allow the natural descent and closing of the door pursuant to Bauart A1 standard.		4018025
	45° curve in stainless steel	Ø mm 150	4017005
	Flexible pipe to channel air	Ø mm 150 - 1,5 m	4017007
	Supplementary handle for Plasma	Optional	4019016
	Chimney handling kit 1 rubber 4 revolving wheels 4 threaded pipes for transport		4017008
	Comfort Air Kit Available in Slim and Basic. The hood kit should be completed by choosing 2 hot air outlets. > p. 134	Slim Basic VF Basic VN	4011012 4008038N 4008036

PLASMA 75 DX Wood



VIVO 90 Q Wood



WOOD > GLASS-FRONTED FIREPLACES > VIVO Q



VIVO 90 Q Wood

Model: VIVO 90Q WOOD

POWER					cm A x B x C
kW 11,6	85,1%	Ø cm 20	kg 135	cm 88,7 x 45 x 54,7	



MATERIALS:
Steel: structure
Alutec®: combustion chamber

VERSION

VIVO 90 Q Wood	5020002
----------------	---------

DEDICATED ACCESSORIES

Four sided frame 50 mm steel frame (optional).	6309021
--	---------



Comfort Air Kit

Available in Slim and Basic. The kit should be completed by choosing 2 hot air outlets. > p. 134

Slim	4011012
Basic VF	4008038N
Basic VN	4008036



VIVO 70 Q Wood

Model: VIVO 70Q WOOD

POWER					cm A x B x C
kW 11,6	85,1%	Ø cm 20	kg 125	cm 71,7 x 45 x 62,2	



MATERIALS:
Steel: structure
Alutec®: combustion chamber

VERSION

VIVO 70 Q Wood	5020001
----------------	---------

DEDICATED ACCESSORIES

Four sided frame 50 mm steel frame (optional).	6309020
--	---------



Comfort Air Kit

Available in Slim and Basic. The kit should be completed by choosing 2 hot air outlets. > p. 134

Slim	4011012
Basic VF	4008038N
Basic VN	4008036

VIVO 70 Q Wood











PELLET_Accessories

126 GENERAL ACCESSORIES

129 COMFORT AIR STOVES ACCESSORIES

PELLET > GENERAL ACCESSORIES

		VERSIONS AVAILABLE/CODE	€
	<p>LINEAR PIPE Painted pipe, 25/50/100 cm, with silicone gasket.</p>	<p>L= 25 cm - ø cm 8 4022005 L= 50 cm - ø cm 8 4022006 L= 100 cm - ø cm 8 4022007</p>	
	<p>90° CURVE Painted curve with silicone gasket.</p>	<p>ø cm 8 4022008</p>	
	<p>90° CURVE WITH INSPECTION HOLE Painted curve with silicone gasket.</p>	<p>ø cm 8 4022010</p>	
	<p>90° CURVE GASKETS WITH HOLE INSPECTION 5 pc. package</p>	<p>4012022</p>	
	<p>45° CURVE Painted curve with silicone gasket.</p>	<p>ø cm 8 4022009</p>	
	<p>T-UNION Condensate/ash collection painted tee union with inspection cap and silicone gasket.</p>	<p>ø cm 8 4022004</p>	

PELLET > GENERAL ACCESSORIES

		VERSIONS AVAILABLE/CODE	
	FEMALE-FEMALE TEE FITTING Painted tee union with silicone gasket.	ø cm 8	4022012
	DRAUGHT ADJUSTOR Pipe with silicone gasket fitted with device to adjust excessive draught.	ø cm 8	4010002
	WALL COUPLING Painted wall coupling with silicone gasket.	ø cm 8	4022011
	F/F-UNION Painted pipe with silicone gaskets.	ø cm 8/8 ø cm 10/10	4013010 4013009
	WINDPROOF CAP Stainless steel windproof cap for wall discharge.	ø cm 8	40160156
	WALL FLANGE Painted wall flange.	ø cm 8	40160466

PELLET > GENERAL ACCESSORIES

		DESCRIPTION/CODE	
	<p>PIPE CLIP Pipe support clip for wall fastening.</p>	<p>ø cm 8</p> <p>40120968</p>	
	<p>SILICONE GASKET for 8 cm pellet stove pipes.</p>	<p>5-pack.</p> <p>40120969</p>	
	<p>FLOOR PROTECTION Available in charcoal painted metal and in tempered glass (photo) Standard version: 90x100 cm (width x depth) Slim pellet stove version: 95x57 cm (width x depth) Sheet thickness: 2 mm Glass thickness: 6 mm</p>	<p>Standard version - metal 40140139 Standard version - glass 40170147 Slim version - metal 4011051 Slim version - glass 4011050</p>	
	<p>TOUCH-UP PAINT Water-based silicone spray paint Check on the unit for the code to use.</p>	<p>Black - 400 ml 4017011 Black touch-up color for C16 powder paints 400 ml 4020012</p>	
	<p>CLEANING KIT AND STOVE MAINTENANCE CASE Contains: - Hexagonal wrench - Set of brushes and paintbrushes (3 pieces) - Complete set of inner gaskets and fire door (5 kits) - Glass cleaning spray - Bolts and screws and washer - High temperature silicone - Manual</p>	<p>4009023</p>	
	<p>MAINTENANCE CASE GASKETS REFILL KIT Complete set of inner gaskets and fire door (5 kits)</p>	<p>4012027</p>	

PELLET > COMFORT AIR STOVES > ACCESSORIES




		VERSIONS AVAILABLE/CODE	
	<p>FLIP HOT AIR OUTLET Complete with two lamps and air humidifier.</p>	White	4012017
	<p>FLOAT HOT AIR OUTLET Complete with two lamps.</p>	White Black/white (as in photo)	4012018 4012019
	<p>GHOST HOT AIR OUTLET Complete with one lamp and air humidifier.</p>	White glass Black glass	4012020 4012021
	<p>MINIMAL HOT AIR OUTLET Backlit metal air vent, can be painted like back wall.</p>	Cm 21,5x21,5	4017009
	<p>SOFT HOT AIR OUTLET Backlit ceramic air vent.</p>	Cm 25x25	4017010
	<p>MULTI 12 HOT AIR OUTLET Kit contents: One (1) 120x120 mm multi-directional hot air outlet One (1) frame One (1) Ø 60 flange One (1) Ø 60 plug Four (4) screws One (1) clamp</p>		4009010



PELLET > COMFORT AIR STOVES > ACCESSORIES

		VERSIONS AVAILABLE/CODE
	<p>Ø 60 mm STRAIGHT UNION Ducting connection union. Kit contents: One (1) Ø 60 straight union Two (2) clamps</p>	<p>4009008</p>
	<p>Ø 60 mm "Y" UNION Union to divert the flow of hot air in 2 ducts. Kit contents: One (1) Y union Three (3) clamps</p>	<p>4009009</p>
	<p>Ø 60 mm 90° CURVE Kit contents: One (1) 90° union Three (2) clamps</p>	<p>4009011</p>
	<p>FLEX PIPE Ø 60 L = 8 m</p>	<p>4009017</p>
	<p>FLEX PIPE Ø 60 L = 1.5 m</p>	<p>4009003</p>
	<p>INSULATED FLEX PIPE Ø 60 mm interior/110 mm exterior L= 3 m</p>	<p>4013005</p>

PELLET > COMFORT AIR STOVES > ACCESSORIES

		VERSIONS AVAILABLE/CODE
	<p>FLEXIBLE PIPE ø 100 mm - L=1.5 m ø 100 mm insulated - L=10 m insulated</p>	<p>40160049 4008049</p>
	<p>Ø 60 mm DUCTING KIT Complete kit for ducting air up to 1.5 m. Kit contents: One (1) 90° union One (1) flex pipe L = 1.5 m Four (4) clamps One (1) Ø 60 fan/pipe union Choose the hot air outlets to complete the kit</p>	<p>4011044</p>
	<p>Ø 60 mm FAN/PIPE UNION Union for ducting with Ø 60 mm pipe. Kit contents: One (1) Ø 60 fan/pipe union Two (2) screws One (1) clamp</p>	<p>4009007</p>
	<p>Ø 60 mm STRAIGHT UNION - 150 mm Ducting connection union. To be purchased in combination with code 4009008</p>	<p>4015013</p>
	<p>Ø 80 mm FAN/PIPE UNION Union for ducting with Ø 80 mm pipe. Kit contents: One (1) Ø 80 fan/pipe union Two (2) screws One (1) clamp</p>	<p>4009013</p>
	<p>Ø 60/80 mm PIPE ADAPTER</p>	<p>4014008</p>

WOOD_Accessories

144 GENERAL ACCESSORIES

134 COMFORT AIR SLIM

138 COMFORT AIR BASIC

WOOD > COMFORT AIR SLIM freely positionable motor (forced ventilation)

VERSIONS AVAILABLE/CODE



SLIM FV VENTILATION KIT

Ventilation kit for standard connection with hot air outlets positioned in the hood or remotely and motor positioned freely between the glass-fronted fireplace and the hot air outlet. The hood kit should be completed by choosing 2 hot air outlets.

Complete kit 4011012

THE KIT INCLUDES:

FAN

Complete with housing and inspection hatch
(x2)



REMOTE CONTROL

Complete with electronic control unit
(x1)



FLEXIBLE PIPE

Ø 100 mm - L=1.5 m
(x2)



FLEXIBLE PIPE

Ø 60 mm - L=1.5 m
(x2)



FLANGE Ø 100

Ø 100 mm
(x2)



CLAMPS

(x8)



FLIP VENTILATION OUTLET

Complete with two lamps and air humidifier.

White glass/1 pc. 4012017



FLOAT VENTILATION OUTLET

Complete with two lamps and air humidifier.

White glass/white frame/1 pc. 4012018
White glass/black frame/1 pc. 4012019



GHOST VENTILATION OUTLET

Complete with one lamp and air humidifier.

White/1 pc. 4012020
Black/1 pc. 4012021



MINIMAL VENTILATION OUTLET

Backlit metal air vent, can be painted like back wall.

4017009



SOFT VENTILATION OUTLET

Backlit ceramic air vent.

4017010



MULTI 12 VENTILATION OUTLET







1 pc. 4009010



WOOD > COMFORT AIR SLIM > ACCESSORIES

		VERSIONS AVAILABLE/CODE	
	FLIP VENTILATION OUTLET Silk screen printed glass flipping air outlet to direct the flow of hot air. Metal support. Complete with two lamps and air humidifier.	White glass	4012017
	FLOAT VENTILATION OUTLET Silk screen printed glass air outlet and curved metal frame. Complete with two lamps and air humidifier.	White glass and white frame White glass and black frame	4012018 4012019
	GHOST VENTILATION OUTLET Silk screen printed glass flipping air outlet. Brushed steel support. Complete with one lamp and air humidifier.	White glass Black glass	4012020 4012021
	MINIMAL VENTILATION OUTLET Backlit metal air vent, can be painted like back wall.		4017009
	SOFT VENTILATION OUTLET Backlit ceramic air vent.		4017010
	MULTI 12 VENTILATION OUTLET	1 pc.	4009010
	REMOTE CONTROL Complete with electronic control unit.	1 pc.	4011006
	FAN Complete with housing and inspection hatch.	1 pc.	4011008
	FLEXIBLE PIPE Ø 100 mm - L=1.5 m	1 pc.	40160049
	Ø 100 mm insulated - L=10 m	1 pc.	4008049
	FLEXIBLE PIPE Ø 60 mm - L=3 m insulated	1 pc.	4013005
	Ø 60 mm - L=1.5 m	1 pc.	4009003
	FLANGE Ø 100 Ø 100 mm	1 pc.	4008047

WOOD > COMFORT AIR SLIM > ACCESSORIES

		VERSIONS AVAILABLE/CODE	
	FLANGE Ø 60 Ø 60 mm	1 pc.	4011011
	Ø 60 STRAIGHT UNION Ø 60 mm	1 pc.	4009008
	PIPE CLAMPS Ø 60/170 mm	1 pc.	4008043
	BLADE VENTILATION OUTLET Metal air outlet 99x6,1 cm Metal air outlet 60x6,7 cm	White White	4011016 4012066
	LINE VENTILATION OUTLET Metal air outlet 99x7,3 cm	White	4020010
	BIG VENTILATION OUTLET Metal air outlet 51,6x18,5 cm	White	4011018

GHOST



FLOAT



FLIP



MINIMAL



SOFT

WOOD > COMFORT AIR BASIC > motor placed behind the outlets (natural ventilation)

VERSIONS AVAILABLE/CODE



VN HOOD KIT (natural ventilation)

Ventilation kit for standard connection with outlets positioned in the hood above the fireplace. The kit is completed by choosing 2 outlets (mono, bi or multidirectional).

Complete kit 4008036

THE KIT INCLUDES:

VN DUCT FRAME

(x2)



FLEXIBLE PIPE

ø 150 mm - L=1.5 m

(x2)



FLANGE

ø 150 mm

(x2)



PIPE CLAMP

ø 60-170 mm

(x4)



FASTENING BRACKET ASSEMBLY

(x2)



MONO 20 > MONO-DIRECTIONAL AIR OUTLET WITH HUMIDIFIER

*The mono-directional air outlet with light code 4008023 must be installed on duct frame code 4008046

Without light 4008021
With light* 4008023



BI 20 > BI-DIRECTIONAL AIR OUTLET

4008024



MULTI 20 > MULTI-DIRECTIONAL AIR OUTLET

4008025



WOOD > COMFORT AIR BASIC > motor placed behind the outlets (forced ventilation)

VERSIONS AVAILABLE/CODE



FV HOOD KIT (forced ventilation)

Ventilation kit for standard connection with outlets positioned in the hood above the fireplace. The kit is completed by choosing 2 outlets (mono, bi or multidirectional).

Complete kit 4008038N

THE KIT INCLUDES:

FAN ASSEMBLY

(x2)



CONTROL UNIT

(x1)



FLEXIBLE PIPE

ø 100 mm - L=1.5 m
(x2)



FLANGE

ø 100 mm
(x2)



PIPE CLAMP

Ø 60/170 mm
(x4)



FASTENING BRACKET ASSEMBLY

(x2)



MONO 20 > MONO-DIRECTIONAL AIR OUTLET WITH HUMIDIFIER

Without light 4008021
With light 4008023



BI 20 > BI-DIRECTIONAL AIR OUTLET

4008024












MULTI 20 > MULTI-DIRECTIONAL AIR OUTLET

4008025



WOOD > COMFORT AIR BASIC > INDIVIDUAL ACCESSORIES (natural ventilation)

		VERSIONS AVAILABLE/CODE	
<p>WHEN TO USE THE INDIVIDUAL NV and FV ACCESSORIES. The 2 hood kits described in the previous two pages accommodate standard connections with air outlets located in the hood, above the glass-fronted fireplace. For other types of solutions, the use of the individual NV and FV accessories described on these two pages is required.</p>			
	<p>MONO 20 > MONO-DIRECTIONAL AIR OUTLET WITH HUMIDIFIER Warning: the mono-direc. air outlet with light code 4008023 must be installed on duct frame code 4008046</p>	Without light With light	4008021 4008023
	<p>BI 20 > BI-DIRECTIONAL AIR OUTLET Warning: the air outlet must be installed on duct frame code 4008044</p>		4008024
	<p>MULTI 20 > MULTI-DIRECTIONAL AIR OUTLET Warning: the air outlet must be installed on duct frame code 4008044</p>		4008025
	<p>VN DUCT FRAME + BRACKET</p>		4008044
	<p>NV DUCT FRAME WITH LIGHT + BRACKET</p>		4008046
	<p>FLEXIBLE PIPE ø 150 mm - L=1.5 m</p>		40160051
	<p>FLANGE ø 150 mm for NV</p>		40120167
	<p>PIPE CLAMP ø 60-170 mm</p>		4008043
	<p>BASIC > VENTILATION GRILLE</p>	99x5,2 cm	4008040
	<p>BASIC FILTER > FILTERED AIR OUTLET</p>	53,5x16,5 cm	4008039

WOOD > COMFORT AIR BASIC > INDIVIDUAL ACCESSORIES (forced ventilation)

		VERSIONS AVAILABLE/CODE	
	MONO 20 > MONO-DIRECTIONAL AIR OUTLET WITH HUMIDIFIER	Without light With light	4008021 4008023
	BI 20 > BI-DIRECTIONAL AIR OUTLET		4008024
	MULTI 20 > MULTI-DIRECTIONAL AIR OUTLET		4008025
	FAN ASSEMBLY + BRACKET		4008050
	CONTROL UNIT Complete with probe and power supply cable		4008026N
	FLEXIBLE PIPE	ø 100 mm - L=1.5 m ø 100 mm insulated - L=10 m insulated	40160049 4008049
	FLANGE ø 100 mm for FV		4008047
	PIPE CLAMP ø 60-170 mm		4008043
	RECESSED BOX		4008051
	BASIC > VENTILATION GRILLE	99x5,2 cm	4008040
	BASIC FILTER > FILTERED AIR OUTLET	53,5x16,5 cm	4008039

WOOD > COMFORT AIR BASIC > EXAMPLE

		VERSIONS AVAILABLE/CODE	PZ.
<p>WHEN TO USE THE SINGLE ACCESSORIES - EXAMPLE</p> <p>The two hood kits accommodate standard connections with air outlets located above the glass-fronted fireplace. For other types of solutions, the use of NV and FV individual accessories is required.</p> <p>For example, to duct air to a distance of 6 m, with two forced ventilation air outlets, the following accessories are required:</p>			
	<p>MONO/BI/MULTI-DIRECTIONAL AIR OUTLET</p> <p>As desired.</p>	<p>4008021 4008023 4008024 4008025</p>	2
	<p>FAN ASSEMBLY + BRACKET</p>	<p>4008050</p>	2
	<p>CONTROL UNIT</p> <p>Complete with probe and power supply cable - can control up to 2 motors.</p>	<p>4008026</p>	1
	<p>FLEXIBLE PIPE</p>	<p>ø 100 mm - L=1.5 m 40160049 ø 100 mm insulated - L=10 m insulated 4008049</p>	2
	<p>FLANGE</p> <p>ø 100 mm for FV</p>	<p>4008047</p>	2
	<p>PIPE CLAMP</p> <p>ø 60-170 mm</p>	<p>4008043</p>	4
<p>IT IS ALSO POSSIBLE TO ADD:</p>			
	<p>RECESSED BOX</p> <p>Contains and protects the fan when it is to be recessed in a stone or brick wall.</p>	<p>4008051</p>	
	<p>BASIC > VENTILATION GRILLE</p> <p>For convection hot air inlet/outlet, instead of normal grilles.</p>	<p>99x5,2 cm 4008040</p>	
	<p>BASIC FILTER > FILTERED AIR OUTLET</p> <p>Allows filtering and purification of the inlet air.</p>	<p>53,5x16,5 cm 4008039</p>	



WOOD > GENERAL ACCESSORIES

		VERSIONS AVAILABLE/CODE	
	<p>HOT AIR OUTLET KIT One (1) adjustable nozzle, ø 15 cm 20x20 cm One (1) flexible aluminium pipe, ø 15 cm, L = 150 cm One (1) connection flange, ø 15 cm Two (2) clamps</p>	White nozzle Brass coated nozzle	40160067 40160072
>PLASMA >FORMA >VIVO			
	<p>DUAL HOT AIR OUTLET KIT WITH LARGE NOZZLE One (1) large nozzle with unions ø 15 cm - 50x20 cm Two (2) flexible aluminium pipes, ø 15 cm, L = 150 cm Four (4) clamps Two (2) flange unions ø 15 cm</p>	White nozzle	40160073
>PLASMA >FORMA >VIVO			
	<p>SQUARE NOZZLE WITH CAP AND UNION Ø 15 cm cm 20x20</p>	White nozzle	40160007
>PLASMA >FORMA >VIVO			
	<p>ADJUSTABLE HOOD VENTILATION OUTLET WITH CAP cm 25x10</p>	White nozzle Brass coated nozzle	40160001 40160002
>PLASMA >FORMA >BOXTHERM			
	<p>EXTRA-FLEXIBLE ALUMINIUM AIR SUCTION PIPE 10 m - Maximum operating temperature 140 °C.</p>	Ø cm 15 Ø cm 10	40160441 40160440
>PLASMA >FORMA >VIVO >BOXTHERM			
	<p>FLEXIBLE ALUMINIUM PIPE FOR HOT AIR DUCTING 1.5 m</p>	Ø cm 15	40160051
>PLASMA >FORMA			

WOOD > GENERAL ACCESSORIES

		VERSIONS AVAILABLE/CODE	
	<p>FLANGE For connecting pipes to the glass-fronted fireplace.</p> <p>>PLASMA* >FORMA* >BOXTHERM</p>	<p>Ø cm 10 40120165 Ø cm 15* 40120167</p>	
	<p>CERAMIC FIBRE MAT Pack containing 8.92 m² of ceramic fibre mat</p> <p>>PLASMA >FORMA >VIVO >BOXTHERM</p>	<p>Roll width 0.60 m. 40180129</p>	
	<p>STIFF INSULATION PANEL 100x61 cm, thickness 2.5 cm.</p> <p>>PLASMA >FORMA >VIVO >BOXTHERM</p>	<p>40180039</p>	
	<p>TOUCH-UP PAINT Water-based silicone spray paint - 400 ml</p> <p>>PLASMA >FORMA >VIVO >BOXTHERM</p>	<p>Black 4017011 Black touch-up color for C16 powder paints 400 ml 4020012</p>	
	<p>GLASS SPRAY CLEANER Product for cleaning glass-fronted fireplace and stove glass surfaces. Contents 0.75 l. per bottle Pack of 12 bottles.</p>	<p>Minimum pack 12 pcs. 40180012</p>	

GENERAL SALES CONDITIONS

- 1 The prices are to be considered ex-works.
- 2 The goods are shipped at the purchasers risk and hazard, even if shipped free at destination.
- 3 The company reserves the right to make modifications to its models which it feels are necessary for functional or aesthetic reasons, even without advance notice.
- 4 Differences in colours, shades and grains must be accepted in that marble and stone, being natural materials, may undergo substantial variations even within the same specimen of material. This non-continuity in shades and grains is not to be considered a defect; even the gluing of marble and putty are to be considered normal working and are universally accepted. In claddings that call for solid wood beams, any fissures are not to be considered as manufacturing defects, but as normal settling of the wood. Ceramics may have indentations, speckling and shading. This particular characteristic of the material does not affect quality and is not to be considered a defect.
- 5 Any claims concerning stains or breakage will be accepted only if they are detected upon receipt and duly noted on the shipping documents.
- 6 Reasons different from those set forth in point 5 will be considered only if they are communicated in writing no later than eight days from receipt of goods.
- 7 Any material which is returned, with transport paid for by the customer, only if in good condition and with the prior consent of MCZ GROUP S.p.A., will be accredited at 75% of the invoiced value.
- 8 Modifications to standard claddings must be accepted by the company after a cost estimate and will be possible only if a drawing is presented.
- 9 Payment must be made to our location by the agreed due date. Failure to meet said payments will cause accrued interest to be charged at the current rate, plus expenses. Material, including that on display, shall remain our property until full payment is made.
- 10 In case of controversies, the Court of Pordenone shall have jurisdiction.
- 11 The prices shown in the price list do not include VAT.
- 12 Effective 01/01/2023.